

KoreaCC

- [About KoreaCC](#)
 - [General information about credit card payments with KoreaCC](#)
 - [Process flow chart](#)
- [Paygate interface](#)
 - [Definitions](#)
 - [Data formats](#)
 - [Abbreviations](#)
 - [Calling the interface](#)
 - [Capture](#)
 - [Credit with reference](#)
 - [Reversal](#)


About KoreaCC

General information about credit card payments with KoreaCC

Logo	KoreaCC
Info	KoreaCC is a payment method which enables Korean merchants (based in South Korea) to offer domestic customers (with Korean credit cards) a credit card payment method.
Type	Payments by Credit Card

Card Scheme
MasterCard
VISA
AMEX
JCB
KOOKMIN
KEB
BC
SHINHAN
SAMSUNG
HYUNDAI
LOTTE

Process flow chart

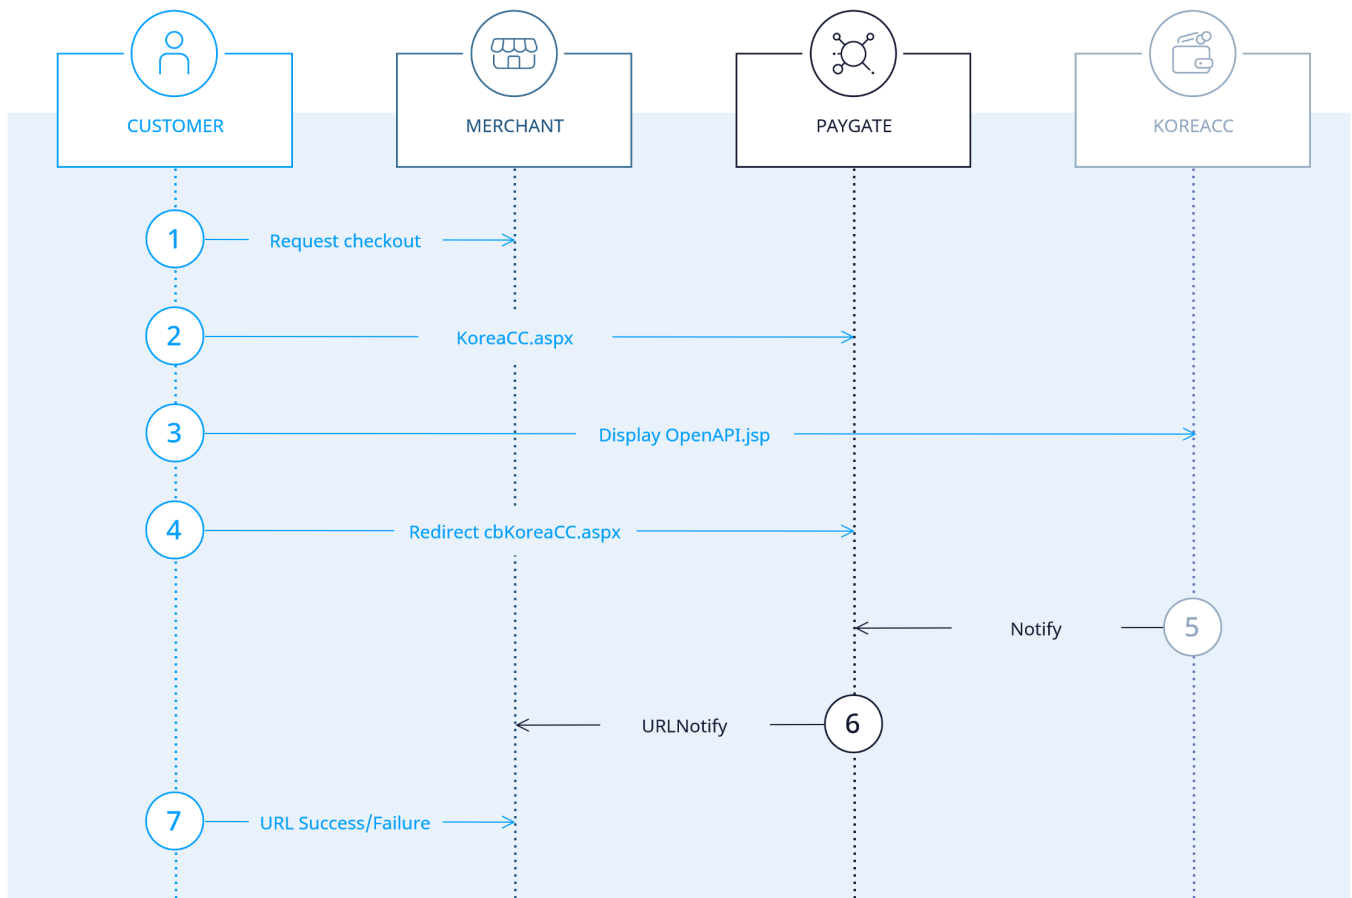

Process flow of a credit card payment with KoreaCC

Paygate interface

Definitions

Data formats

Format	Description
a	alphabetical
as	alphabetical with special characters
n	numeric
an	alphanumeric
ans	alphanumeric with special characters
ns	numeric with special characters
bool	boolean expression (true or false)
3	fixed length with 3 digits/characters
..3	variable length with maximum 3 digits/characters
enum	enumeration of allowed values
dtm	ISODateTime (YYYY-MM-DDThh:mm:ss)

Abbreviations

Abbreviation	Description	Comment
CND	condition	
M	mandatory	If a parameter is mandatory, then it must be present
O	optional	If a parameter is optional, then it can be present, but it is not required
C	conditional	If a parameter is conditional, then there is a conditional rule which specifies whether it is mandatory or optional

Notice: Please note that the names of parameters can be returned in upper or lower case.

Calling the interface

Following credit card brands are supported: „Samsung“, „Kookmin“, „KEB“, „Hyunday“, „Shinhan“, „BC“, „Lotte“, „VISA“, „MasterCard“, „JCB“, „AMEX“.

Only the currency KRW is supported. This currency is forwarded as WON and no conversion is done. WON is not a ISO 4217 currency and therefore not supported by Computop Paygate. However WON is displayed in the Paygate.Net form because Paygate.Net does not support KRW. Note that KRW has no decimal places according to ISO 4217.

Credit card data (and/or other authorisation data such as mobile no. etc.) is entered into the Paygate.Net form. Sensitive data is not transferred to Computop. Computop retains no credit card numbers or PCNR.

The reference numbers entered (RefNr or TransId) are not printed onto the customer's bill.

In order to make a credit card payment with KoreaCC via a Paygate form, please use the following URL:

<https://www.computop-paygate.com/KoreaCC.aspx>

Notice: For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Only KRW permissible. Please find an overview here: A1 Currency table
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)
Order Desc	a..100	O	Shopping basket information
URLSuccess	ans..256	M	Complete URL which calls up Paygate if payment has been successful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter UserData . i Common notes: - We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate - However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLSuccess. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.

URLFailure	ans..256	M	Complete URL which calls up Paygate if payment has been unsuccessful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter UserData. Common notes: - We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate - However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLSuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.								
Response	a7	O	Status response sent by Paygate to URLSuccess and URLFailure , should be encrypted. For this purpose, transmit Response=encrypt parameter.								
URLNotify	ans..256	M	Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the UserData parameter instead. Common notes: - We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate - However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLSuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.								
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.								
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.								
Capture	an..6	OM	Determines the type and time of capture. <table><tr><th>Capture Mode</th><th>Description</th></tr><tr><td>AUTO</td><td>Capturing immediately after authorisation (default value).</td></tr><tr><td>MANUAL</td><td>Capturing made by the merchant. Capture is normally initiated at time of delivery.</td></tr><tr><td><Number></td><td>Delay in hours until the capture (whole number; 1 to 696).</td></tr></table>	Capture Mode	Description	AUTO	Capturing immediately after authorisation (default value).	MANUAL	Capturing made by the merchant. Capture is normally initiated at time of delivery.	<Number>	Delay in hours until the capture (whole number; 1 to 696).
Capture Mode	Description										
AUTO	Capturing immediately after authorisation (default value).										
MANUAL	Capturing made by the merchant. Capture is normally initiated at time of delivery.										
<Number>	Delay in hours until the capture (whole number; 1 to 696).										
Language	a2	M	Language of the form. There are supported only KR and US.								
Buyer Name	ans..50	O	Name of the buyer for the email notification								
Buyer Mail	ans..128	O	Email address of the buyer for the email notification								
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.								
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom								

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den Computop Helpdesk , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.
--------	-------	---	--	---

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Only KRW permissible. Please find an overview here: A1 Currency table	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Nur KRW zulässig. Hier eine Übersicht: A1 Währungstabelle

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: HMAC-Authentisierung (Anfrage) HMAC-Authentisierung (Notify)

Key	Format	CND	Description	Beschreibung
OrderDesc	a..100	O	Shopping basket information	Warenkorbinformation

Key	Format	CND	Description	Beschreibung
URLSuccess	ans..256	M	Complete URL which calls up Paygate if payment has been successful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter UserData . i Common notes: - We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate - However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLSuccess. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.	Vollständige URL, die das Paygate aufruft, wenn die Zahlung erfolgreich war. Die URL darf nur über Port 443 aufgerufen werden. Diese URL darf keine Parameter enthalten: Um Parameter durchzureichen nutzen Sie stattdessen den Parameter UserData . i Allgemeine Hinweise: - Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten - Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLSuccess senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.

Key	Format	CND	Description	Beschreibung
URLFailure	ans..256	M	Complete URL which calls up Paygate if payment has been unsuccessful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter UserData . i Common notes: - We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate - However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLSuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.	Vollständige URL, die das Paygate aufruft, wenn die Zahlung gescheitert ist. Die URL darf nur über Port 443 aufgerufen werden. Diese URL darf keine Parameter enthalten: Um Parameter durchzureichen nutzen Sie stattdessen den Parameter UserData . i Allgemeine Hinweise: - Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten - Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLSuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.

Key	Format	CND	Description	Beschreibung
Response	a7	O	Status response sent by Paygate to URLSuccess and URLFailure , should be encrypted. For this purpose, transmit Response=encrypt parameter.	Die Status-Rückmeldung, die das Paygate an URLSuccess und URLFailure sendet, sollte verschlüsselt werden. Dazu übergeben Sie den Parameter Response=encrypt .

Key	Format	CND	Description	Beschreibung
URLNotify	ans..256	M	Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the UserData parameter instead. i Common notes: - We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate - However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLSuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.	Vollständige URL, die das Paygate aufruft, um den Shop zu benachrichtigen. Die URL darf nur über Port 443 aufgerufen werden. Sie darf keine Parameter enthalten: Nutzen Sie stattdessen den Parameter UserData . i Allgemeine Hinweise: - Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten - Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLSuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.

Key	Format	CND	Description	Beschreibung
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
ReqId	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqId, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqId functionality on Paygate does not take effect. Submissions with identical ReqId for an open status will be processed regularly. Notice: Please note that a ReqId is only valid for 12 month, then it gets deleted at the Paygate.	Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqId erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück. Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqId-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqId auf einen offenen Status werden regulär verarbeitet. Hinweis: Bitte beachten Sie, dass eine ReqId nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.

Key	Format	CND	Description		Beschreibung	
Capture	an..6	OM	Determines the type and time of capture.		Bestimmt Art und Zeitpunkt der Buchung (engl. Capture).	
			Capture Mode	Description	Buchungsart Beschreibung	
			AUTO	Capturing immediately after authorisation (default value).	AUTO	Buchung sofort nach Autorisierung (Standardwert).
			MANUAL	Capturing made by the merchant. Capture is normally initiated at time of delivery.	MANUAL	Buchung erfolgt durch den Händler - in der Regel die Buchung zum Zeitpunkt der Warenauslieferung bzw. Leistungserbringung.
			<Number>	Delay in hours until the capture (whole number; 1 to 696).	<Zahl>	Verzögerung in Stunden bis zur Buchung (ganze Zahl; 1 bis 696).

Key	Format	CND	Description	Beschreibung
Language	a2	M	Language of the form. There are supported only KR and US.	Sprache des Formulars. Es werden nur KR und US unterstützt.
BuyerName	ans..50	O	Name of the buyer for the email notification	Name des Käufers für E-Mail-Benachrichtigung
BuyerMail	ans..128	O	Email address of the buyer for the email notification	E-Mail-Adresse des Käufers für E-Mail-Benachrichtigung

Key	Format	CND	Description	Beschreibung
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.	Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID. Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt.

Key	Format	CND	Description	Beschreibung
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the "I" is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom	Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt. Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird "I" durch "&" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück. Hier finden Sie ein Beispiel: Custom

Parameters for credit card payments via KoreaCC

The following table gives the result parameters which Computop Paygate transmits to **URLSuccess** or **URLFailure** and **URLNotify**. If you have specified the **Response=encrypt** parameter, the following parameters are sent **Blowfish encrypted** to your system:

i pls. be prepared to receive additional parameters at any time and do not check the order of parameters

i the key (e.g. MerchantId, RefNr) should not be checked case-sensitive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Status	a..50	M	AUTHORIZE_REQUEST (URLSuccess) as well as FAILED (URLFailure)
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
CodeExt	ans4	M	Error code from downstream system about payment result
ErrorText	ans..256	M	Detailed information about payment result. The value can include Korean characters.
TransactionID	ans..30	M	Unique transaction number generated by external system for each payment
Type	ans..20	M	Gives payment method, for credit card: SSL
CCBrand	a..10	O	Name of card brand, e.g. Samsung, KOOKMIN, KEB, BC, Shinhan, Hyunday, Lotte, VISA, MasterCard, AMEX, JCB
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers
-----------------------	--------	---	------------------------------------	--

Key	Format	CND	Description	Beschreibung
Status	a..50	M	AUTHORIZE_REQUEST (URLSuccess) as well as FAILED (URLFailure)	AUTHORIZE_REQUEST (URLSuccess) sowie FAILED (URLFailure)

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter Description , sondern Code für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)	Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes)

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: HMAC-Authentisierung (Anfrage) HMAC-Authentisierung (Notify)

Key	Format	CND	Description	Beschreibung
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
CodeExt	ans4	M	Error code from downstream system about payment result	Fehlercode vom nachgelagerten System zum Zahlungsergebnis
ErrorText	ans..256	M	Detailed information about payment result. The value can include Korean characters.	Detaillierte Informationen zum Zahlungsergebnis. Der Wert kann koreanische Zeichen enthalten.
TransactionID	ans..30	M	Unique transaction number generated by external system for each payment	Vom externen System vergebene, eindeutige Transaktionsnummer pro Zahlung
Type	ans..20	M	Gives payment method, for credit card: SSL	Gibt das Zahlungsmittel an, für Kreditkarte: SSL
CCBrand	a..10	O	Name of card brand, e.g. Samsung, KOOKMIN, KEB, BC, Shinhan, Hyunday, Lotte, VISA, MasterCard, AMEX, JCB	Bezeichnung der Kartenmarke wie Samsung, KOOKMIN, KEB, BC, Shinhan, Hyunday, Lotte, VISA, MasterCard, AMEX, JCB

Key	Format	CND	Description	Beschreibung
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.	Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID. Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt.

Key	Format	CND	Description	Beschreibung
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the "I" is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom	Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt. Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird "I" durch "&" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück. Hier finden Sie ein Beispiel: Custom

Result parameters for URLNotify, URLSuccess and URLFailure in case of KoreaCC

Capture

Captures are possible via a Server-to-Server connection. To carry out a Capture via a Server-to-Server connection please use the following URL:

<https://www.computop-paygate.com/capture.aspx>

Notice: For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
PayID	an32	M	ID assigned by Paygate for the payment to be captured
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment to be captured	Vom Paygate vergebene ID für die zu buchende Zahlung

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den Computop Helpdesk , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: A1 Währungstabelle

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: HMAC-Authentisierung (Anfrage) HMAC-Authentisierung (Notify)
-----	------	---	--	---

Key	Format	CND	Description	Beschreibung
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.	Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück. Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet. Hinweis: Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.

Parameters for captures of credit card payments with KoreaCC

The following table describes the result parameters with which the Computop Paygate responds to your system

 pls. be prepared to receive additional parameters at any time and do not check the order of parameters

 the key (e.g. MerchantID, RefNr) should not be checked case-sensitive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)
CodeExt	ans4	M	Error code from downstream system about payment result
ErrorText	ans..256	M	Detailed information about payment result. The value can include Korean characters.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)	OK (URLSuccess) oder FAILED (URLFailure)

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter Description , sondern Code für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)	Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes)

Key	Format	CND	Description	Beschreibung
CodeExt	ans4	M	Error code from downstream system about payment result	Fehlercode vom nachgelagerten System zum Zahlungsergebnis
ErrorText	ans..256	M	Detailed information about payment result. The value can include Korean characters.	Detaillierte Informationen zum Zahlungsergebnis. Der Wert kann koreanische Zeichen enthalten.

Response parameters for captures of credit card payments with KoreaCC

Credit with reference

Credits (refunds) are possible via a Server-to-Server connection. If you refer to a capture for a Credit the amount of the Credit is limited to the amount of the previous capture.

To carry out a credit with a reference transaction, please use the following URL:

<https://www.computop-paygate.com/credit.aspx>

Notice: For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
PayID	an32	M	ID assigned by Paygate for the payment to be credited
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment to be credited	Vom Paygate vergebene ID für die gutzuschreibende Zahlung

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den Computop Helpdesk , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: A1 Währungstabelle

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: HMAC-Authentisierung (Anfrage) HMAC-Authentisierung (Notify)

Key	Format	CND	Description	Beschreibung
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.	Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück. Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet. Hinweis: Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.

Parameters for credits of credit card payments with KoreaCC

The following table describes the result parameters with which the Computop Paygate responds to your system

 pls. be prepared to receive additional parameters at any time and do not check the order of parameters

 the key (e.g. MerchantId, RefNr) should not be checked case-sensitive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)

CodeExt	ans4	M	Error code from downstream system about payment result
ErrorText	ans..256	M	Detailed information about payment result. The value can include Korean characters.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)	OK (URLSuccess) oder FAILED (URLFailure)

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter Description , sondern Code für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)	Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes)

Key	Format	CND	Description	Beschreibung
CodeExt	ans4	M	Error code from downstream system about payment result	Fehlercode vom nachgelagerten System zum Zahlungsergebnis
ErrorText	ans..256	M	Detailed information about payment result. The value can include Korean characters.	Detaillierte Informationen zum Zahlungsergebnis. Der Wert kann koreanische Zeichen enthalten.

Response parameters for credits of credit card payments with KoreaCC

Reversal

A credit card authorisation lowers the customer's credit line. Paygate can reverse an authorisation so that it no longer block the limit any more. Use the following URL:

<https://www.comutop-paygate.com/reverse.aspx>

Notice: Reverse.aspx does not only reverse authorisations, but any LAST TRANSACTION STAGE! If the last transaction was a capture, Reverse.aspx initiates the reverse, e.g. a credit. Therefore, the utmost caution is urged. Use is at your own risk. We recommend checking the transaction status with Inquire.aspx before using Reverse.aspx.

Notice: For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
PayID	an32	M	ID assigned by Paygate for the payment to be reversed
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment to be reversed	Vom Paygate vergebene ID für die zu stornierende Zahlung

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den Computop Helpdesk , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: A1 Währungstabelle

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: HMAC-Authentisierung (Anfrage) HMAC-Authentisierung (Notify)

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.	Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück. Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet. Hinweis: Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.
-------	---------	---	---	--

Parameters for reversal of credit card payments with KoreaCC

The following table describes the result parameters with which the Computop Paygate responds to your system

 pls. be prepared to receive additional parameters at any time and do not check the order of parameters

 the key (e.g. MerchantId, RefNr) should not be checked case-sensitive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)
CodeExt	ans4	M	Error code from downstream system about payment result
ErrorText	ans..256	M	Detailed information about payment result. The value can include Korean characters.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)	OK (URLSuccess) oder FAILED (URLFailure)

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

Description	ans..1024	M	Further details in the event that payment is rejected. Please d o not use the Description but the Code parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter Description , sondern Code für die Auswertung des Transaktionsstatus!
-----------------------------	-----------	---	---	--

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)	Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes)

Key	Format	CND	Description	Beschreibung
CodeExt	ans4	M	Error code from downstream system about payment result	Fehlercode vom nachgelagerten System zum Zahlungsergebnis
ErrorText	ans..256	M	Detailed information about payment result. The value can include Korean characters.	Detaillierte Informationen zum Zahlungsergebnis. Der Wert kann koreanische Zeichen enthalten.

Response parameters for reversals of credit card payments with KoreaCC