

# Alipay

## About Alipay

### General information about Alipay

China is the second largest market worldwide for online payments with annual sales of over 100 billion US Dollars and it offers the greatest growth potential for eCommerce. Alipay is a leading local Payment Service Provider (PSP) with a popular E-Wallet for online payments. Alipay supports transactions within China as well as cross-border transactions (CrossBorder) to foreign merchants, which are directly billed in one of the supported currencies.

Alipay Spot Payment is a payment variant for Alipay customers who also want to use their Alipay account in store. The checkout system scans a barcode generated by the Alipay App from the customer's mobile phone and then calls an Alipay online interface via Computop Paygate. Alipay Spot Payment is available only for cross-border partners.

Alipay QR Code Payment is another variant of In-store Payment. The checkout system produces a QR Code according to the payment data by calling an Alipay API via Computop Paygate, and then the customer scans the QR Code with his mobile device to finish the payment. Alipay QR Code Payment is available only for cross-border partners.

Alipay In-App Payment is a variant of Online Payment. The customer makes purchase within merchant's App. When he checks out, the merchant's App gets a request string from Computop Paygate. Then the customer is redirected to Alipay's App on his mobile device with this request string and completes the payment. Alipay In-App Payment is available only for cross-border partners.


Logo	 Alipay.com
Info	Customers and merchants can send and receive payments with the E-Wallet from China's leading online payment system. Alipay has over 800 million registered users and in 2014 it processed over 100 million online payments per day.
Type	Payments by eWallet

Further information you will find also on the webpage of Alipay (<https://intl.alipay.com/>, <https://global.alipay.com/open/doc.htm>).


### Process flow charts

### On this page


- [About Alipay](#)
  - [General information about Alipay](#)
  - [Process flow charts](#)
- [On this page](#)
- [Paygate interface](#)
  - [Definitions](#)
    - [Data formats](#)
    - [Abbreviations](#)
  - [Calling the interface for an Alipay Website payment](#)
  - [Calling the interface for a payment with Alipay Spot Payment](#)
  - [Calling the interface for a payment with Alipay QR Code Payment](#)
  - [Calling the interface for a payment with Alipay In-App Payment](#)
  - [Reversal](#)
  - [Credit with reference](#)
  - [Status request for Alipay Spot Payment](#)
- [Batch processing via the interface](#)

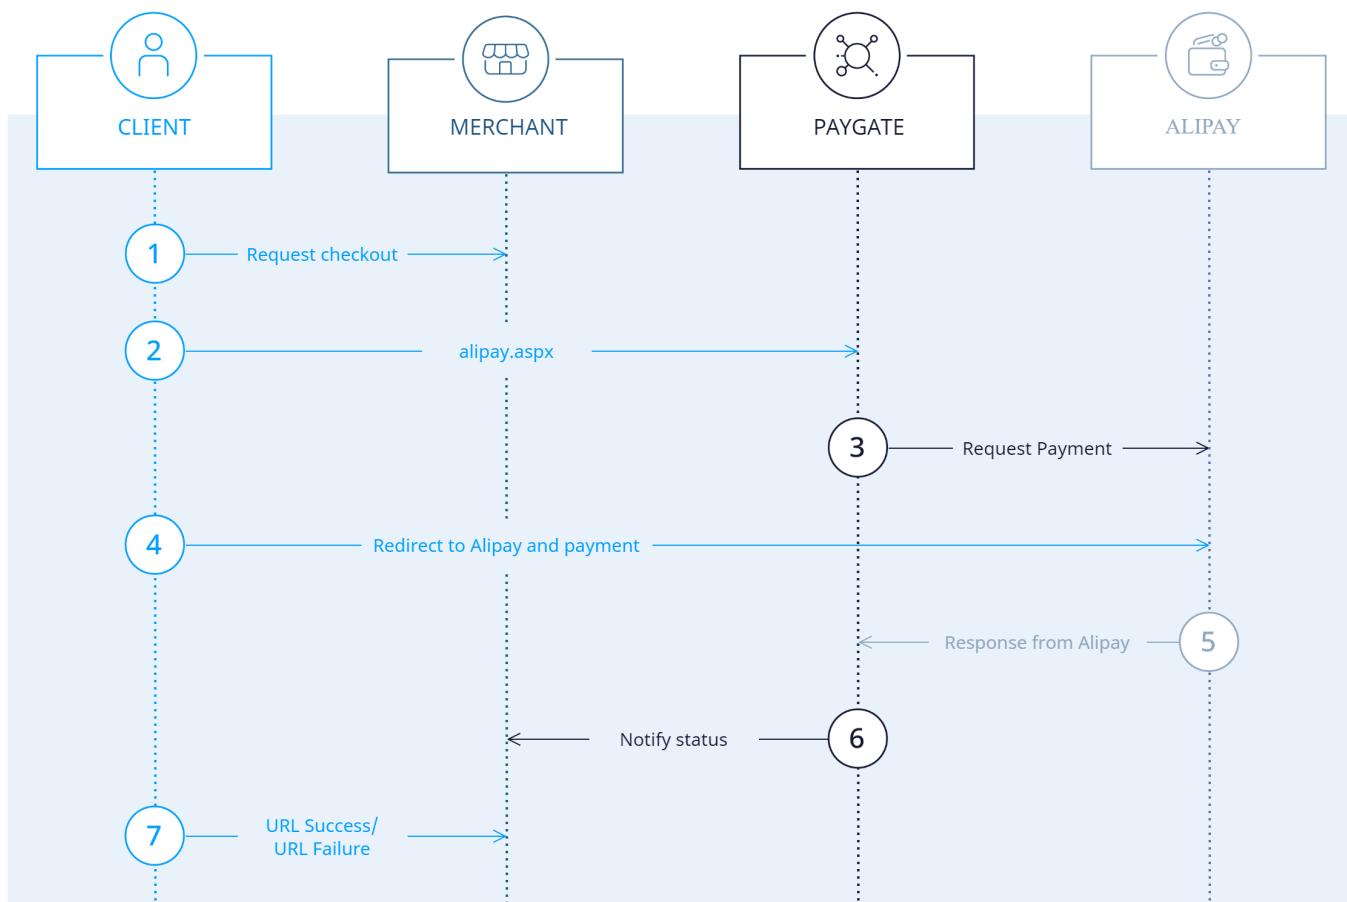


Alipay Website Payment process flow

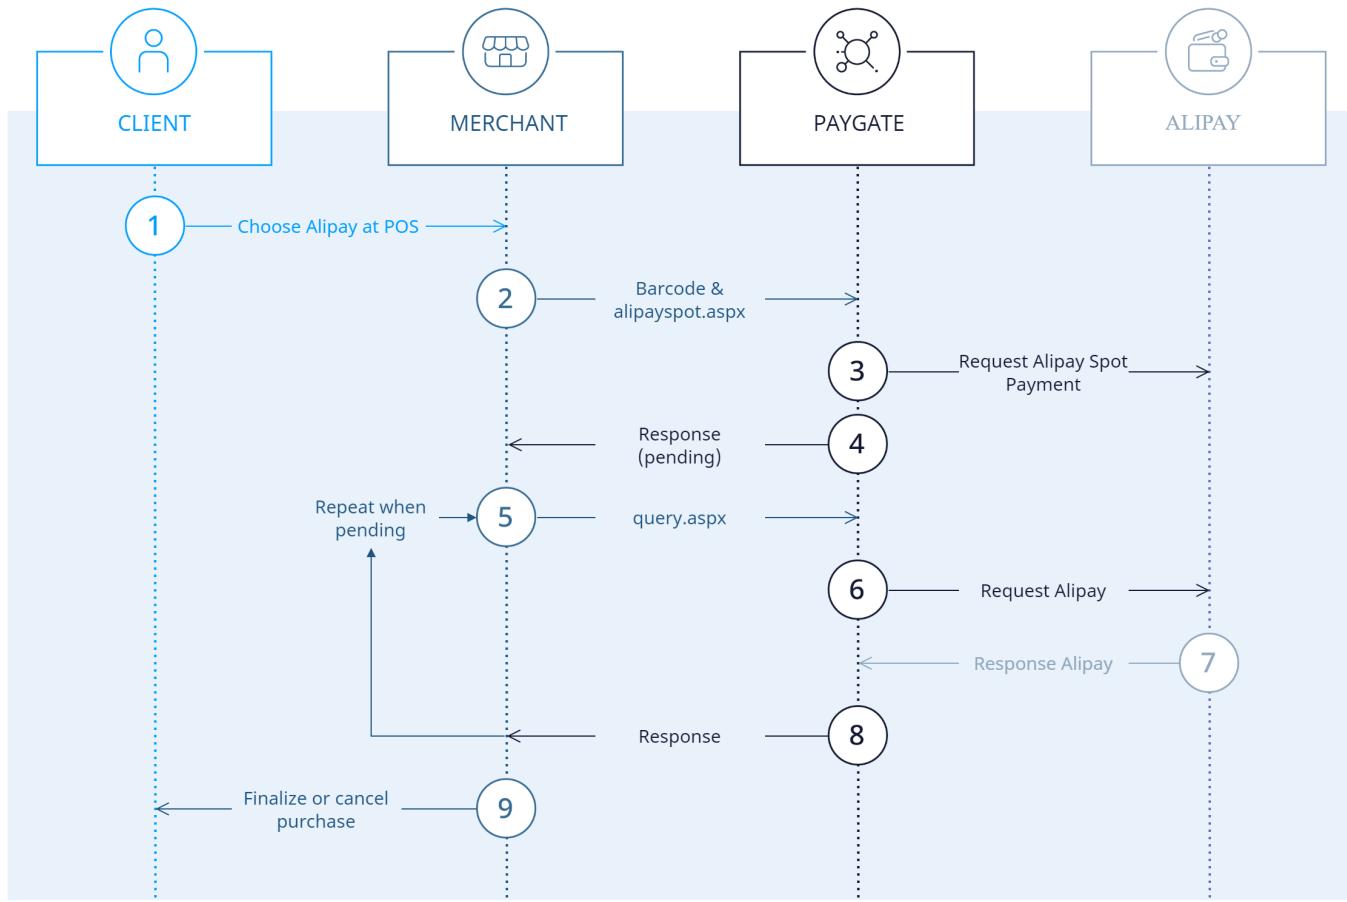

Alipay Spot Payment process flow

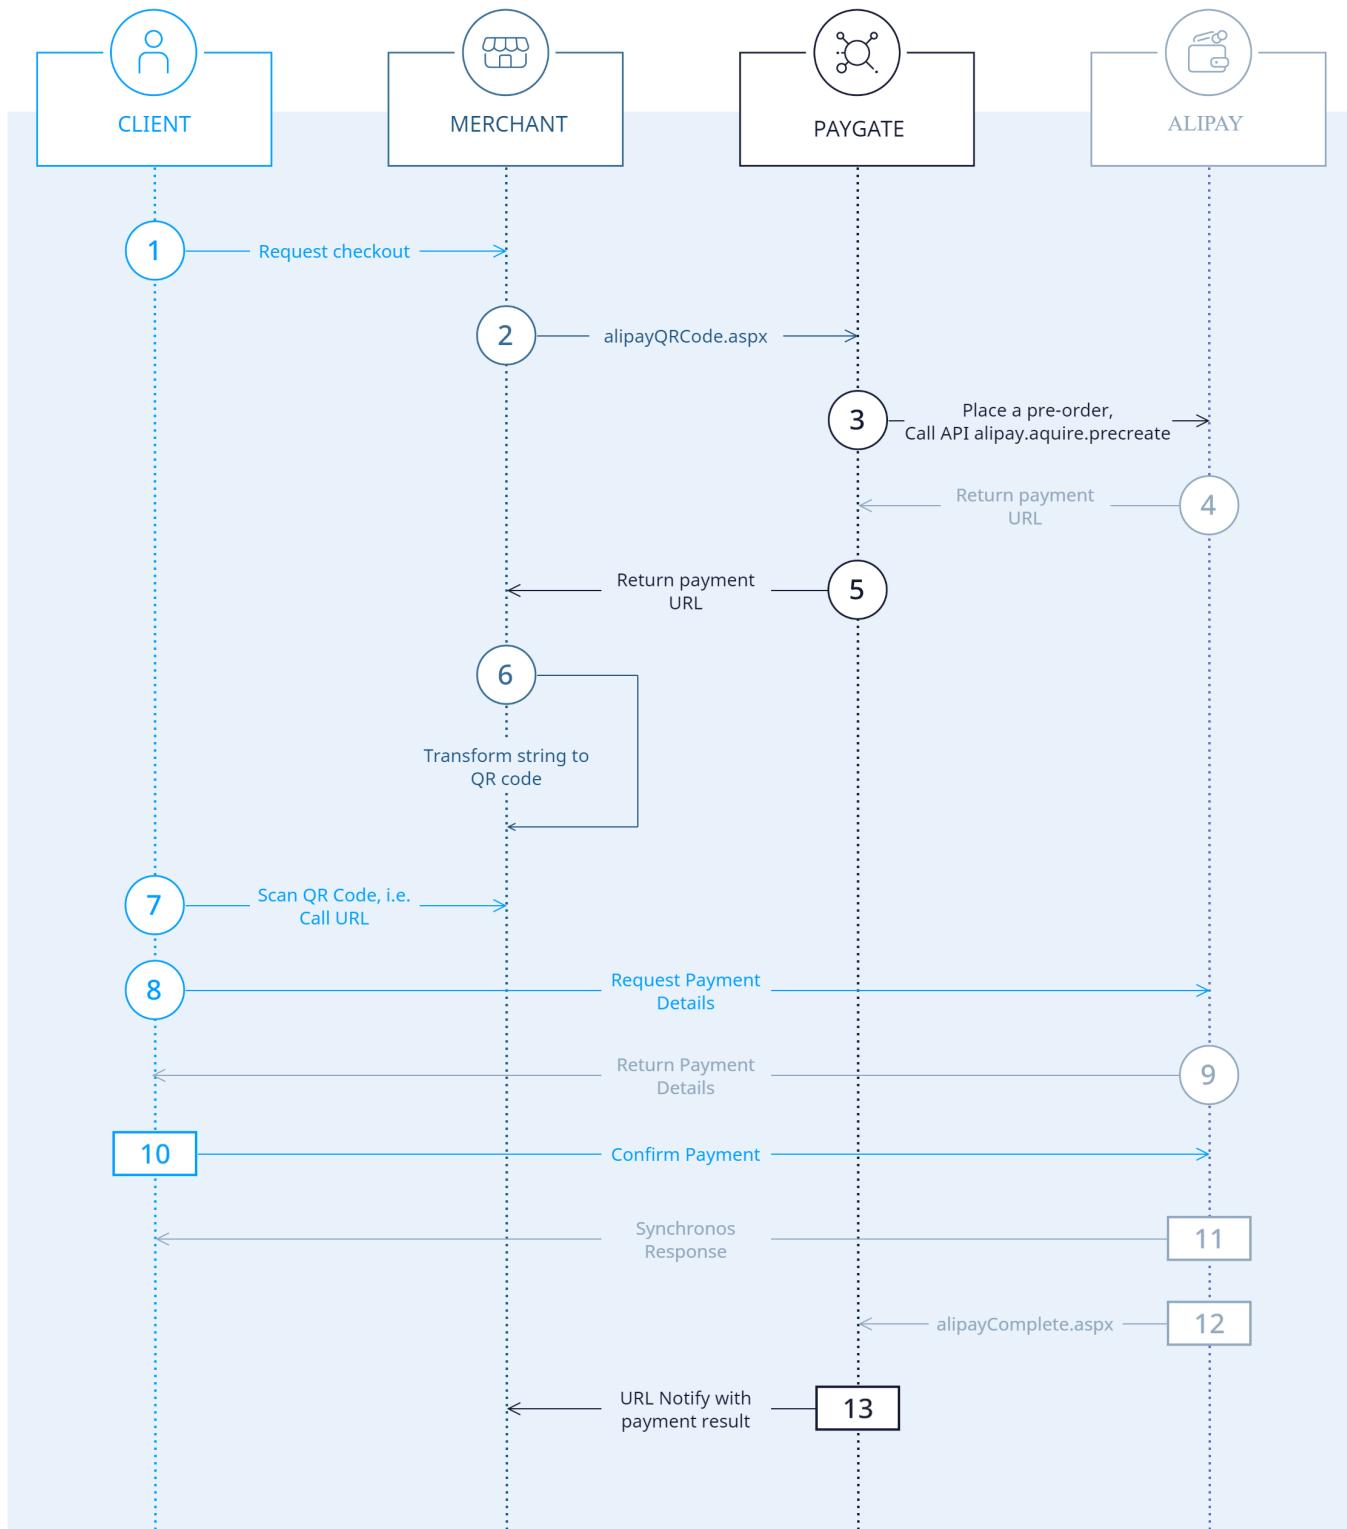

Alipay QR Code Payment process flow

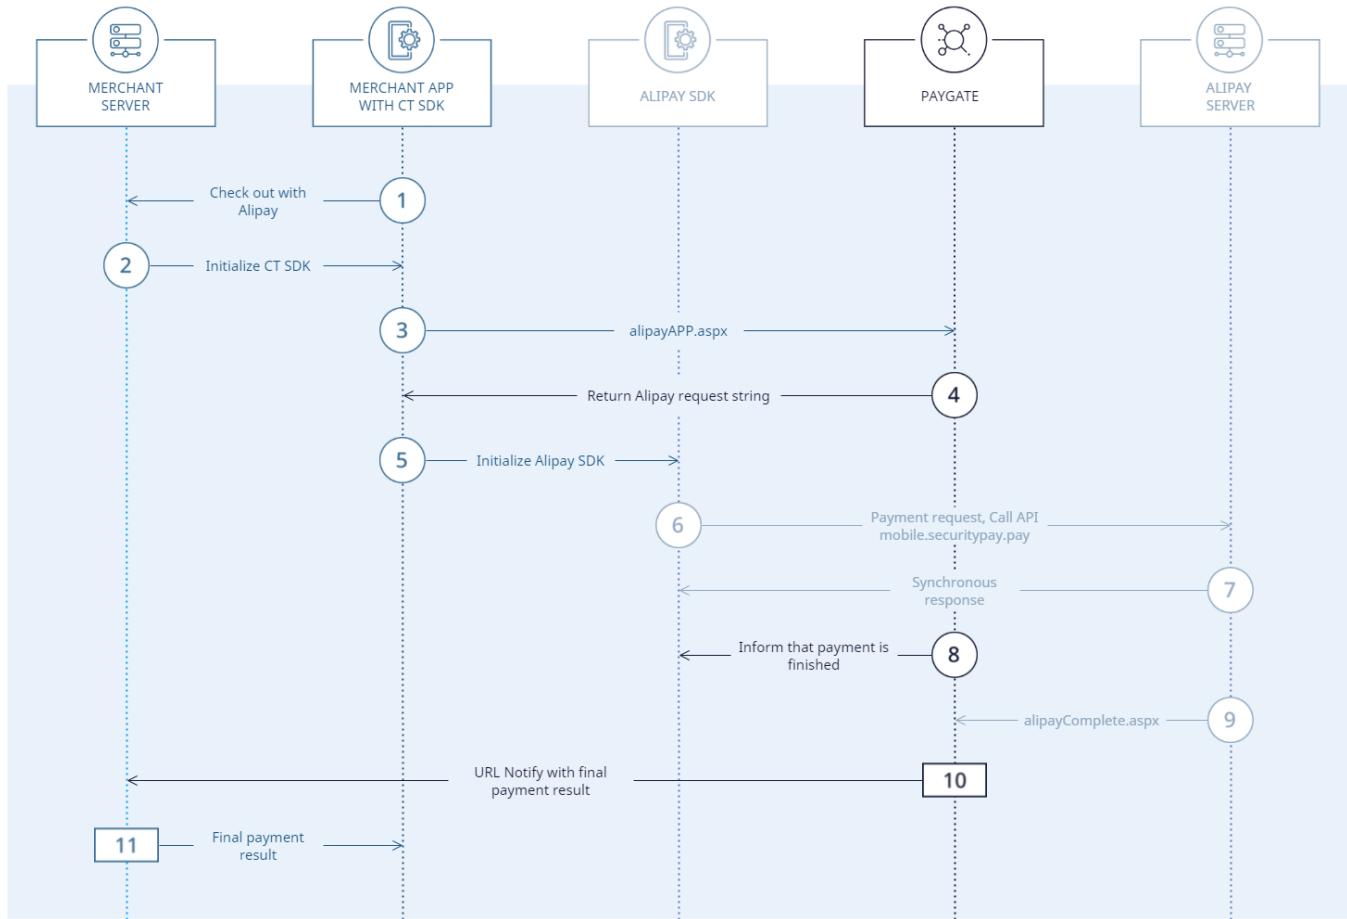

## Paygate interface

### Definitions

#### Data formats

Format	Description
a	alphabetical
as	alphabetical with special characters
n	numeric
an	alphanumeric
ans	alphanumeric with special characters
ns	numeric with special characters
bool	boolean expression (true or false)
3	fixed length with 3 digits/characters
..3	variable length with maximum 3 digits/characters
enum	enumeration of allowed values
dttm	ISODateTime (YYYY-MM-DDThh:mm:ss)

## Abbreviations

Abbreviation	Description	Comment
CND	condition	
M	mandatory	If a parameter is mandatory, then it must be present
O	optional	If a parameter is optional, then it can be present, but it is not required
C	conditional	If a parameter is conditional, then there is a conditional rule which specifies whether it is mandatory or optional

**Notice:** Please note that the names of parameters can be returned in upper or lower case.

## Calling the interface for an Alipay Website payment

Cancellations and credits are available for Alipay payments as described in the sections below. Only credits are available in batch mode. For point-of-sale transactions please use connection for Alipay Spot Payment or QR Code payment.

Enter the following URL to process an Alipay Website payment via the Computop Paygate form:

<https://www.computop-paygate.com/alipay.aspx>

**Notice:** For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
Merch antID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Amou nt	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
Curren cy	a3	M	Currency, three digits DIN / ISO 4217. For merchants in China (inland) only CNY is permitted; CNY is not permitted for cross-border merchants. Please find an overview here: <a href="#">A1 Currency table EN</a>
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>
Order Desc	ans..768	M	Name of the goods purchased. The special characters "#", "&", "%" and "+" are not permitted here.
Order Desc2	ans..400	M	Description of purchased goods and their quantity in the format goods_name1;quantity1+goods_name2;quantity2. <> separates goods and quantity within one goods data record <+> separates multiple goods data records Example: iPhone X;1+iPhone 8;2 The special characters "#", "&" and "%" are not permitted here.
ShopU RL	an..128	M	URL of web shop, for example <a href="https://testmerchant.com">https://testmerchant.com</a>

URLSuccess	ans..256	M	Complete URL which calls up Paygate if payment has been successful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter <a href="#">UserData</a> .  <b>i Common notes:</b> <ul style="list-style-type: none"> <li>We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>
URLFailure	ans..256	M	Complete URL which calls up Paygate if payment has been unsuccessful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter <a href="#">UserData</a> .  <b>i Common notes:</b> <ul style="list-style-type: none"> <li>We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>
Response	a7	O	Status response sent by Paygate to <a href="#">URLSuccess</a> and <a href="#">URLFailure</a> , should be encrypted. For this purpose, transmit <a href="#">Response=encrypt</a> parameter.
URLNotify	ans..256	M	Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the <a href="#">UserData</a> parameter instead.  <b>i Common notes:</b> <ul style="list-style-type: none"> <li>We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.  Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.  <b>Notice:</b> Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.
Timeout	ans..3	O	Time limit for a transaction (for domestic merchants only) from 1 minute up to 15 days  Details are given in the form of a two-digit integer plus an identifier:  m (minute) h (hour) d (day)  Because only integer numbers are allowed, instead of 1.5 hours the value 90m must be used. Additionally 1c means until end of present day.  Use is possible only in agreement with <a href="#">Computop Helpdesk</a> .
CustomerID	ans..16	O	unique customer number

AccBank	ans..7	OC	Obligatory for e-banking: The end customer is forwarded direct to the stated bank. Only possible for domestic merchants. <ul style="list-style-type: none"> <li>- ICBCBTB: Industrial and Commercial Bank of China</li> <li>- ABCBTB: Agricultural Bank of China</li> <li>- CCBBTB: China Construction Bank</li> <li>- SPDBB2B: Shanghai Pudong Development Bank</li> <li>- BOCB2C: Bank of China</li> <li>- ICBBC2C: Industrial and Commercial Bank of China</li> <li>- CMB: China Merchants Bank</li> <li>- CCB: China Construction Bank</li> <li>- ABC: Agricultural Bank of China</li> <li>- SPDB: Shanghai Pudong Development Bank</li> <li>- CIB: Industrial Bank</li> <li>- GDB: Guangdong Development Bank</li> <li>- SDB: Shenzhen Development Bank</li> <li>- CMBC: China Minsheng Banking</li> <li>- COMM: Bank of Communications</li> <li>- CITIC: China Citic Bank</li> <li>- HZCBB2C: Bank of Hangzhou</li> <li>- CEBBANK: China Everbright Bank</li> <li>- SHBANK: Bank of Shanghai</li> <li>- NBBANK: Bank of Ningbo</li> <li>- SPABANK: Ping An Bank</li> <li>- BJBANK: Bank of Beijing</li> <li>- BJRCB: Beijing Rural Commercial Bank</li> <li>- FDB: Fudian Bank</li> <li>- POSTGC: PostalSavings Bank of China</li> <li>- abc1003: Visa</li> <li>- abs1004: Master</li> </ul>
Device	a6	O	When submitting "Mobile" the mobile version of Alipay is called instead of the desktop version
FxCurrency	a3	OC	Currency for settlement. Three digits DIN / ISO 4217.  Only allowed for Crossborder merchants, obligatory if Currency=CNY CNY is not allowed here.
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID.  "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.  The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.  Please find a samples here: <a href="#">Custom</a>

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung

Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.
--------	-------	---	--	---

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217. For merchants in China (inland) only CNY is permitted; CNY is not permitted for cross-border merchants. Please find an overview here: <a href="#">A1 Currency table EN</a>	Währung, drei Zeichen DIN / ISO 4217. Für Händler in China (Inland) ist nur CNY erlaubt, für Crossborder-Händler ist CNY nicht erlaubt. Hier eine Übersicht: <a href="#">A1 Währungstabelle</a>

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"><li>• <a href="#">HMAC Authentication (Request)</a></li><li>• <a href="#">HMAC Authentication (Notify)</a></li></ul>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: <ul style="list-style-type: none"><li>• <a href="#">HMAC-Authentisierung (Anfrage)</a></li><li>• <a href="#">HMAC-Authentisierung (Notify)</a></li></ul>

Key	Format	CND	Description	Beschreibung
Order Desc	ans..768	M	Name of the goods purchased. The special characters "#", "&", "%" and "+" are not permitted here.	Name der gekauften Waren. Die Sonderzeichen „#“, „&“, „%“ sowie „+“ sind hier nicht zulässig.
Order Desc2	ans..400	M	Description of purchased goods and their quantity in the format goods_name1;quantity1+goods_name2;quantity2.  <;> separates goods and quantity within one goods data record <> separates multiple goods data records  Example: iPhone X;1+iPhone 8;2  The special characters "#", "&" and "%" are not permitted here.	Beschreibung der gekauften Waren und deren Menge im Format goods_name1;Menge1+goods_name2;Menge2.  <;> trennt Waren und Menge innerhalb eines Datensatzes <> trennt mehrere Datensätze  Beispiel: iPhone X;1+iPhone 8;2  Die Sonderzeichen „#“, „&“ sowie „%“ sind hier nicht zulässig.
ShopURL	an..128	M	URL of web shop, for example <a href="https://testmerchant.com">https://testmerchant.com</a>	URL des Internet-Shops, zum Beispiel <a href="https://testmerchant.com">https://testmerchant.com</a>

Key	Format	CND	Description	Beschreibung
URLSuccess	ans..256	M	Complete URL which calls up Paygate if payment has been successful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter <a href="#">UserData</a> .  <b>Common notes:</b> <ul style="list-style-type: none"><li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li><li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li></ul>	Vollständige URL, die das Paygate aufruft, wenn die Zahlung erfolgreich war. Die URL darf nur über Port 443 aufgerufen werden. Diese URL darf keine Parameter enthalten: Um Parameter durchzureichen nutzen Sie stattdessen den Parameter <a href="#">UserData</a> .  <b>Allgemeine Hinweise:</b> <ul style="list-style-type: none"><li>• Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten</li><li>• Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.</li></ul>

Key	Format	CND	Description	Beschreibung
URLFailure	ans..256	M	Complete URL which calls up Paygate if payment has been unsuccessful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter <a href="#">UserData</a> .  <b>Common notes:</b> <ul style="list-style-type: none"><li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li><li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li></ul>	Vollständige URL, die das Paygateaufruft, wenn die Zahlung gescheitert ist. Die URL darf nur über Port 443 aufgerufen werden. Diese URL darf keine Parameter enthalten: Um Parameter durchzureichen nutzen Sie stattdessen den Parameter <a href="#">UserData</a> .  <b>Allgemeine Hinweise:</b> <ul style="list-style-type: none"><li>• Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten</li><li>• Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.</li></ul>

Key	Format	CND	Description	Beschreibung
Response	a7	O	Status response sent by Paygate to <a href="#">URLSuccess</a> and <a href="#">URLFailure</a> , should be encrypted. For this purpose, transmit <a href="#">Response=encrypt</a> parameter.	Die Status-Rückmeldung, die das Paygate an <a href="#">URLSuccess</a> und <a href="#">URLFailure</a> sendet, sollte verschlüsselt werden. Dazu übergeben Sie den Parameter <a href="#">Response=encrypt</a> .
Key	Format	CND	Description	Beschreibung

URLNotify	ans..256	M	<p>Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the <a href="#">UserData</a> parameter instead.</p> <p><b>Common notes:</b></p> <ul style="list-style-type: none"> <li>We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLSuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>	<p>Vollständige URL, die das Paygate aufruft, um den Shop zu benachrichtigen. Die URL darf nur über Port 443 aufgerufen werden. Sie darf keine Parameter enthalten: Nutzen Sie stattdessen den Parameter <a href="#">UserData</a>.</p> <p><b>Allgemeine Hinweise:</b></p> <ul style="list-style-type: none"> <li>Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten</li> <li>Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLSuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.</li> </ul>
-----------	----------	---	---	---

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
ReqId	ans..32	O	<p>To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.</p> <p>Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.</p> <p><b>Notice:</b> Please note that a ReqID is only valid for 12 months, then it gets deleted at the Paygate.</p>	<p>Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück.</p> <p>Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet.</p> <p><b>Hinweis:</b> Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.</p>

Key	Format	CND	Description	Beschreibung
Timeout	ans..3	O	<p>Time limit for a transaction (for domestic merchants only) from 1 minute up to 15 days</p> <p>Details are given in the form of a two-digit integer plus an identifier:</p> <p>m (minute)</p> <p>h (hour)</p> <p>d (day)</p> <p>Because only integer numbers are allowed, instead of 1.5 hours the value 90m must be used. Additionally 1c means until end of present day.</p> <p>Use is possible only in agreement with <a href="#">Computop Helpdesk</a>.</p>	<p>Zeitlimit für eine Transaktion (nur für Inlandshändler) von 1 Minute bis 15 Tage</p> <p>Angaben erfolgen durch eine zweistellige Integer-Zahl plus eine Kennung:</p> <p>m (Minute)</p> <p>h (Stunde)</p> <p>d (Tag)</p> <p>Da nur ganzzahlige Werte zulässig sind, muss für 1,5 Stunden der Wert 90m verwendet werden. Zusätzlich bedeutet 1c bis zum Ende des aktuellen Tages.</p> <p>Nutzung ist nur in Abstimmung mit dem <a href="#">Computop Helpdesk</a> möglich.</p>
Custom erID	ans..16	O	unique customer number	eindeutige Kundennummer

AccBank	ans..7	OC	Obligatory for e-banking: The end customer is forwarded direct to the stated bank. Only possible for domestic merchants.  - ICBCBTB: Industrial and Commercial Bank of China - ABCBTB: Agricultural Bank of China - CCBBTB: China Construction Bank - SPDBB2B: Shanghai Pudong Development Bank - BOCB2C: Bank of China - ICBCB2C: Industrial and Commercial Bank of China - CMB: China Merchants Bank - CCB: China Construction Bank - ABC: Agricultural Bank of China - SPDB: Shanghai Pudong Development Bank - CIB: Industrial Bank - GDB: Guangdong Development Bank - SDB: Shenzhen Development Bank - CMBC: China Minsheng Banking - COMM: Bank of Communications - CITIC: China Citic Bank - HZCBB2C: Bank of Hangzhou - CEBBANK: China Everbright Bank - SHBANK: Bank of Shanghai - NBBANK: Bank of Ningbo - SPABANK: Ping An Bank - BJ BANK: Bank of Beijing - BJRCB: Beijing Rural Commercial Bank - FDB: Fudian Bank - POSTGC: Postal Savings Bank of China - abc1003: Visa - abs1004: Master	Pflicht für E-Banking: Der Endkunde wird direkt zur angegebenen Bank weitergeleitet. Nur für Händler im Inland möglich.  - ICBCBTB: Industrial and Commercial Bank of China - ABCBTB: Agricultural Bank of China - CCBBTB: China Construction Bank - SPDBB2B: Shanghai Pudong Development Bank - BOCB2C: Bank of China - ICBCB2C: Industrial and Commercial Bank of China - CMB: China Merchants Bank - CCB: China Construction Bank - ABC: Agricultural Bank of China - SPDB: Shanghai Pudong Development Bank - CIB: Industrial Bank - GDB: Guangdong Development Bank - SDB: Shenzhen Development Bank - CMBC: China Minsheng Banking - COMM: Bank of Communications - CITIC: China Citic Bank - HZCBB2C: Bank of Hangzhou - CEBBANK: China Everbright Bank - SHBANK: Bank of Shanghai - NBBANK: Bank of Ningbo - SPABANK: Ping An Bank - BJ BANK: Bank of Beijing - BJRCB: Beijing Rural Commercial Bank - FDB: Fudian Bank - POSTGC: Postal Savings Bank of China - abc1003: Visa - abs1004: Master
Device	a6	O	When submitting "Mobile" the mobile version of Alipay is called instead of the desktop version	Bei Übergabe von „Mobile“ wird statt der Desktop-Version die Mobil-Version von Alipay aufgerufen
FxCurrency	a3	OC	Currency for settlement. Three digits DIN / ISO 4217.  Only allowed for Crossborder merchants, obligatory if Currency=CNY CNY is not allowed here.	Währung für das Settlement. Drei Zeichen DIN / ISO 4217.  Nur für Crossborder-Händler erlaubt, Pflicht wenn Currency=CNY. CNY ist hier nicht erlaubt.

Key	Format	CND	Description	Beschreibung
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID.  "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.	Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID.  Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt.

Key	Format	CND	Description	Beschreibung
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.  The Custom-value is added to the Computop Paygate response in plain text and the ";" is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.  Please find a samples here: <a href="#">Custom</a>	Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt.  Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird ";" durch "&" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück.  Hier finden Sie ein Beispiel: <a href="#">Custom</a>

Parameters for payments with Alipay Website payment

The following table gives the result parameters which Computop Paygate transmits to **URLSuccess** or **URLFailure** and **URLNotify**. If you have specified the **Response=encrypt** parameter, the following parameters are sent **Blowfish encrypted** to your system:

**i** pls. be prepared to receive additional parameters at any time and do not check the order of parameters

**i** the key (e.g. MerchantId, RefNr) should not be checked case-sentive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK or AUTHORIZE_REQUEST ( <b>URLSuccess</b> ) as well as FAILED ( <b>URLFailure</b> )
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )
refnr	ns..30	O	Merchant's unique reference number
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.  The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.  Please find a samples here: <a href="#">Custom</a>

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorsierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK or AUTHORIZE_REQUEST ( <b>URLSuccess</b> ) as well as FAILED ( <b>URLFailure</b> )	OK oder AUTHORIZE_REQUEST ( <b>URLSuccess</b> ) sowie FAILED ( <b>URLFailure</b> )

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>d o not use the Description but the Code parameter</b> for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie <b>nicht</b> den Parameter <b>Description</b> , sondern <b>Code</b> für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"><li>• <a href="#">HMAC Authentication (Request)</a></li><li>• <a href="#">HMAC Authentication (Notify)</a></li></ul>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: <ul style="list-style-type: none"><li>• <a href="#">HMAC-Authentisierung (Anfrage)</a></li><li>• <a href="#">HMAC-Authentisierung (Notify)</a></li></ul>

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID.  "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.	Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID.  Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt.

Key	Format	CND	Description	Beschreibung
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.  The Custom-value is added to the Computop Paygate response in plain text and the "[" is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.  Please find a samples here: <a href="#">Custom</a>	Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt.  Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird "[" durch "&" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück.  Hier finden Sie ein Beispiel: <a href="#">Custom</a>

Result parameters for URLNotify, URLsuccess and URLFailure in case of Alipay Website payment

## Calling the interface for a payment with Alipay Spot Payment

In order to execute a payment with Alipay Spot Payment via server-to-server communication, please use the following URL:

<https://www.computop-paygate.com/alipayspot.aspx>

**Notice:** For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217. For merchants in China (inland) only CNY is permitted; CNY is not permitted for cross-border merchants. Please find an overview here: <a href="#">A1 Currency table EN</a>
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>
OrderDesc	ans..256	M	Name of the transaction which is displayed in the transactions list
OrderDesc2	ans..256	O	Transaction notice
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
BuyerID Code	ans..32	M	Code generated by the Alipay-App. It is designed for the identification of a user.

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217. For merchants in China (inland) only CNY is permitted; CNY is not permitted for cross-border merchants. Please find an overview here: <a href="#">A1 Currency table EN</a>	Währung, drei Zeichen DIN / ISO 4217. Für Händler in China (Inland) ist nur CNY erlaubt, für Crossborder-Händler ist CNY nicht erlaubt. Hier eine Übersicht: <a href="#">A1 Währungstabelle</a>

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: <ul style="list-style-type: none"> <li>• <a href="#">HMAC-Authentisierung (Anfrage)</a></li> <li>• <a href="#">HMAC-Authentisierung (Notify)</a></li> </ul>

Key	Format	CND	Description	Beschreibung
OrderDesc	ans..256	M	Name of the transaction which is displayed in the transactions list	Name der Transaktion, die in der Transaktionsliste angezeigt wird
OrderDesc2	ans..256	O	Transaction notice	Transaktionsnotiz

Key	Format	CND	Description	Beschreibung
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung

BuyerIDCode	ans..32	M	Code generated by the Alipay-App. It is designed for the identification of a user.	Code, der durch die Alipay-App generiert wurde. Er dient der Identifizierung eines Nutzers.
-------------	---------	---	--	---

Parameters for payments with Alipay Spot Payment

The following table describes the result parameters with which the Computop Paygate responds to your system

ⓘ pls. be prepared to receive additional parameters at any time and do not check the order of parameters

ⓘ the key (e.g. MerchantId, RefNr) should not be checked case-sensitive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )
refnr	ns..30	O	Merchant's unique reference number
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
ErrorText	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .
TID	ans..64	O	TransactionID generated by Alipay system

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)	OK, FAILED sowie AUTHORIZE_REQUEST (Wenn noch kein endgültiger Status von Alipay vorliegt. Eventuell muss der Kunde die Zahlung mit seinem Payment-Passwort in der App bestätigen.)

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie <b>nicht</b> den Parameter <b>Description</b> , sondern <b>Code</b> für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
ErrorT ext	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .	Fehlertext vom nachgelagerten System, nur wenn dessen Rückgabe mit <a href="#">Computop Helpdesk</a> abgesprochen.
TID	ans..64	O	TransactionID generated by Alipay system	Vom Alipay-System generierte TransaktionsID

Response parameters from Alipay Spot Payment

## Calling the interface for a payment with Alipay QR Code Payment

In order to execute a payment with Alipay QR Code Payment via server-to-server communication, please use the following URL:

<https://www.computop-paygate.com/alipayQRCode.aspx>

**Notice:** For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
Merch antID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Amou nt	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
Curren cy	a3	M	Currency, three digits DIN / ISO 4217. For merchants in China (inland) only CNY is permitted; CNY is not permitted for cross-border merchants. Please find an overview here: <a href="#">A1 Currency table EN</a>
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>
Order Desc	ans..256	M	Name of the transaction which is displayed in the transactions list
Order Desc2	ans..256	O	Transaction notice
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
URLN otify	ans..256	M	Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the <a href="#">UserData</a> parameter instead.

**Common notes:**

- We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate
- However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss
---------	---------	---	---	--

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217. For merchants in China (inland) only CNY is permitted; CNY is not permitted for cross-border merchants. Please find an overview here: <a href="#">A1 Currency table EN</a>	Währung, drei Zeichen DIN / ISO 4217. Für Händler in China (Inland) ist nur CNY erlaubt, für Crossborder-Händler ist CNY nicht erlaubt. Hier eine Übersicht: <a href="#">A1 Währungstabelle</a>

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"><li>• <a href="#">HMAC Authentication (Request)</a></li><li>• <a href="#">HMAC Authentication (Notify)</a></li></ul>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: <ul style="list-style-type: none"><li>• <a href="#">HMAC-Authentisierung (Anfrage)</a></li><li>• <a href="#">HMAC-Authentisierung (Notify)</a></li></ul>

Key	Format	CND	Description	Beschreibung
OrderDesc	ans..256	M	Name of the transaction which is displayed in the transactions list	Name der Transaktion, die in der Transaktionsliste angezeigt wird
OrderDesc2	ans..256	O	Transaction notice	Transaktionsnotiz

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
URLNo tify	ans..256	M	Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the <a href="#">UserData</a> parameter instead.  <b>Common notes:</b> <ul style="list-style-type: none"><li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li><li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li></ul>	Vollständige URL, die das Paygate aufruft, um den Shop zu benachrichtigen. Die URL darf nur über Port 443 aufgerufen werden. Sie darf keine Parameter enthalten: Nutzen Sie stattdessen den Parameter <a href="#">UserData</a> .  <b>Allgemeine Hinweise:</b> <ul style="list-style-type: none"><li>• Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten</li><li>• Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.</li></ul>

#### Parameters for payments with Alipay QR Code Payment

The following table describes the result parameters, which the Paygate sends back as response in a server-to-server connection, of a pre-ordering of QR Code that will be scanned by the client later. If you have specified the **Response=encrypt** parameter, the following parameters are forwarded Blowfish encrypted to your system:

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment

Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )
refnr	ns..30	O	Merchant's unique reference number
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
ErrorText	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .
QRCodeURL	ans..128	O	If request processed successfully, QR Code Url will be returned, which can be converted to QR Code.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)	OK, FAILED sowie AUTHORIZE_REQUEST (Wenn noch kein endgültiger Status von Alipay vorliegt. Eventuell muss der Kunde die Zahlung mit seinem Payment-Passwort in der App bestätigen.)

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie <b>nicht</b> den Parameter <b>Description</b> , sondern <b>Code</b> für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
ErrorText	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .	Fehlertext vom nachgelagertem System, nur wenn dessen Rückgabe mit <a href="#">Computop Helpdesk</a> abgesprochen.
QRCodeURL	ans..128	O	If request processed successfully, QR Code Url will be returned, which can be converted to QR Code.	Wenn die Anfrage erfolgreich verarbeitet worden ist, wird eine QR-Code Url zurückgegeben, die in einen QR-Code umgewandelt werden kann.

Parameters of synchronous response from Alipay QR Code Payment – Pre-ordering of QR Code

The following table describes the result parameters, which the Paygate transmits to your **URLNotify** when asynchronous notification from Alipay has arrived, of the payment execution. If you have specified the **Response=encrypt** parameter, the following parameters are forwarded Blowfish encrypted to your system:

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )
refnr	ns..30	O	Merchant's unique reference number
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>
ErrorText	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .
TID	ans..64	O	TransactionID generated by Alipay system

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)	OK, FAILED sowie AUTHORIZE_REQUEST (Wenn noch kein endgültiger Status von Alipay vorliegt. Eventuell muss der Kunde die Zahlung mit seinem Payment-Passwort in der App bestätigen.)

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie <b>nicht</b> den Parameter <b>Description</b> , sondern <b>Code</b> für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here:  • <a href="#">HMAC Authentication (Request)</a> • <a href="#">HMAC Authentication (Notify)</a>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier:  • <a href="#">HMAC-Authentisierung (Anfrage)</a> • <a href="#">HMAC-Authentisierung (Notify)</a>

Key	Format	CND	Description	Beschreibung
ErrorT ext	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .	Fehlertext vom nachgelagerten System, nur wenn dessen Rückgabe mit <a href="#">Computop Helpdesk</a> abgesprochen.
TID	ans..64	O	TransactionID generated by Alipay system	Vom Alipay-System generierte TransaktionsID

Parameters of asynchronous response from Alipay QR Code Payment – payment execution

## Calling the interface for a payment with Alipay In-App Payment

In order to execute a payment with Alipay In-App Payment via server-to-server communication, please use the following URL:

<https://www.computop-paygate.com/alipayApp.aspx>

**Notice:** For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
Merch antID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Amou nt	ns..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
Curren cy	a3	M	Currency, three digits DIN / ISO 4217. For merchants in China (inland) only CNY is permitted; CNY is not permitted for cross-border merchants. Please find an overview here: <a href="#">A1 Currency table EN</a>
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here:  • <a href="#">HMAC Authentication (Request)</a> • <a href="#">HMAC Authentication (Notify)</a>
Order Desc	ans..256	M	Name of the transaction which is displayed in the transactions list
Order Desc2	ans..400	M	Description of purchased goods and their quantity in the format goods_name1;quantity1+goods_name2;quantity2.  <> separates goods and quantity within one goods data record <+> separates multiple goods data records  Example: iPhone X;1+iPhone 8;2  The special characters "#", "&" and "%" are not permitted here.

ShopURL	an..128	M	URL of web shop, for example <a href="https://testmerchant.com">https://testmerchant.com</a>
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
URLNotif y	ans..256	M	Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the <a href="#">UserData</a> parameter instead.  <b>i Common notes:</b> <ul style="list-style-type: none"> <li>We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>
FxCurrency	a3	OC	Currency for settlement. Three digits DIN / ISO 4217.  Only allowed for Crossborder merchants, obligatory if Currency=CNY. CNY is not allowed here.

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217. For merchants in China (inland) only CNY is permitted; CNY is not permitted for cross-border merchants. Please find an overview here: <a href="#">A1 Currency table EN</a>	Währung, drei Zeichen DIN / ISO 4217. Für Händler in China (Inland) ist nur CNY erlaubt, für Crossborder-Händler ist CNY nicht erlaubt. Hier eine Übersicht: <a href="#">A1 Währungstabelle</a>

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here:  <ul style="list-style-type: none"> <li><a href="#">HMAC Authentication (Request)</a></li> <li><a href="#">HMAC Authentication (Notify)</a></li> </ul>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier:  <ul style="list-style-type: none"> <li><a href="#">HMAC-Authentisierung (Anfrage)</a></li> <li><a href="#">HMAC-Authentisierung (Notify)</a></li> </ul>

Key	Format	CND	Description	Beschreibung
OrderDesc	ans..256	M	Name of the transaction which is displayed in the transactions list	Name der Transaktion, die in der Transaktionsliste angezeigt wird
OrderDesc2	ans..400	M	Description of purchased goods and their quantity in the format goods_name1;quantity1+goods_name2;quantity2.  <;> separates goods and quantity within one goods data record <;> separates multiple goods data records  Example: iPhone X;1+iPhone 8;2  The special characters "#", "&" and "%" are not permitted here.	Beschreibung der gekauften Waren und ihrer Anzahl im Format goods_name1;quantity1+goods_name2;quantity2.  <;> trennt Waren und Anzahl innerhalb eines Datensatzes <;> trennt mehrere Datensätze  Beispiel: iPhone X;1+iPhone 8;2  Die Sonderzeichen "#", "&" und "%" sind hier nicht erlaubt.
ShopURL	an..128	M	URL of web shop, for example <a href="https://testmerchant.com">https://testmerchant.com</a>	URL des Web-Shops, zum Beispiel <a href="https://testmerchant.com">https://testmerchant.com</a>

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
URLNotify	ans..256	M	<p>Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the <b>UserData</b> parameter instead.</p> <p><b>Common notes:</b></p> <ul style="list-style-type: none"> <li>We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>	<p>Vollständige URL, die das Paygate aufruft, um den Shop zu benachrichtigen. Die URL darf nur über Port 443 aufgerufen werden. Sie darf keine Parameter enthalten: Nutzen Sie stattdessen den Parameter <b>UserData</b>.</p> <p><b>Allgemeine Hinweise:</b></p> <ul style="list-style-type: none"> <li>Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten</li> <li>Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.</li> </ul>

Key	Format	CND	Description	Beschreibung
FxCurrency	a3	OC	<p>Currency for settlement. Three digits DIN / ISO 4217.</p> <p>Only allowed for Crossborder merchants, obligatory if Currency=CNY. CNY is not allowed here.</p>	<p>Währung für die Abrechnung. Drei Zeichen DIN / ISO 4217.</p> <p>Nur für Crossborder-Händler erlaubt, Pflicht wenn Currency=CNY. CNY ist hier nicht erlaubt.</p>

#### Parameters for payments with Alipay In-App Payment

The following table describes the result parameters, which the Paygate sends back as response in a server-to-server connection, to a request of request string for calling the API of In-App Payment. If you have specified the **Response=encrypt** parameter, the following parameters are forwarded Blowfish encrypted to your system:

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )
refnr	ns..30	O	Merchant's unique reference number
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
RequestString	ans..128	O	If request is processed successfully, request string to call Alipay API In-App Payment will be returned

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung

Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)	OK, FAILED sowie AUTHORIZE_REQUEST (Wenn noch kein endgültiger Status von Alipay vorliegt. Eventuell muss der Kunde die Zahlung mit seinem Payment-Passwort in der App bestätigen.)
--------	-------	---	--	---

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie <b>nicht</b> den Parameter <b>Description</b> , sondern <b>Code</b> für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
Reque stString	ans..128	O	If request is processed successfully, request string to call Alipay API In-App Payment will be returned	Wenn die Anfrage erfolgreich verarbeitet worden ist, wird der Anfrage-String zum Aufruf der Alipay-API In-App Payment zurückgegeben

Parameters of synchronous response from Alipay In App Payment – assembling of request string to API call

The following table describes the result parameters, which the Paygate transmits to your **URLNotify** when asynchronous notification from Alipay has arrived, of the payment execution. If you have specified the **Response=encrypt** parameter, the following parameters are forwarded Blowfish encrypted to your system:

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )
refnr	ns..30	O	Merchant's unique reference number
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
ErrorText	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .
TID	ans..64	O	TransactionID generated by Alipay system

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung

XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorsierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden
-----	------	---	--	---

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)	OK, FAILED sowie AUTHORIZE_REQUEST (Wenn noch kein endgültiger Status von Alipay vorliegt. Eventuell muss der Kunde die Zahlung mit seinem Payment-Passwort in der App bestätigen.)

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not use the Description but the Code parameter</b> for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie <b>nicht den Parameter Description, sondern Code</b> für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
ErrorT ext	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .	Fehlertext vom nachgelagerten System, nur wenn dessen Rückgabe mit <a href="#">Computop Helpdesk</a> abgesprochen ist.
TID	ans..64	O	TransactionID generated by Alipay system	Vom Alipay-System generierte TransaktionsID

Parameters of asynchronous response from Alipay In-App Payment – payment execution

## Reversal

Reversals of a payment with Alipay Spot Payment or QR Code payment are possible via a Server-to-Server connection. The Paygate permits reversals that reference a capture or authorisation previously made via Paygate. If you reference a payment in a cancellation, the whole payment is cancelled. A cancellation is only possible with Alipay before the daily reconciliation.

Cancellations are not available for Alipay online payments via alipay.aspx or alipayApp.aspx.

To carry out a Reversal for Alipay Spot Payment or QR Code payment via a Server-to-Server connection please use the following URL:

<https://www.computop-paygate.com/reverse.aspx>

**Notice:** For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
-----	--------	-----	-------------

MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
PayID	an32	M	ID assigned by Paygate for the payment to be reversed
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.  Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.  <b>Notice:</b> Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment to be reversed	Vom Paygate vergebene ID für die zu stormierende Zahlung

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: <a href="#">A1 Währungstabelle</a>

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: <ul style="list-style-type: none"> <li>• <a href="#">HMAC-Authentisierung (Anfrage)</a></li> <li>• <a href="#">HMAC-Authentisierung (Notify)</a></li> </ul>

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung

ReqId	ans..32	O	<p>To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.</p> <p>Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.</p> <p><b>Notice:</b> Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.</p>	<p>Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück.</p> <p>Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet.</p> <p><b>Hinweis:</b> Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.</p>
-------	---------	---	---	--

Parameters for reversal of Alipay Spot Payment or QR Code payment

The following table describes the result parameters with which the Computop Paygate responds to your system

**i** pls. be prepared to receive additional parameters at any time and do not check the order of parameters

**i** the key (e.g. MerchantId, RefNr) should not be checked case-sentive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK ( <a href="#">URLSuccess</a> ) or FAILED ( <a href="#">URLFailure</a> )
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
refnr	ns..30	O	Merchant's unique reference number
ErrorText	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK ( <a href="#">URLSuccess</a> ) or FAILED ( <a href="#">URLFailure</a> )	OK ( <a href="#">URLSuccess</a> ) oder FAILED ( <a href="#">URLFailure</a> )

Key	Format	CND	Description	Beschreibung

<b>Description</b>	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie <b>nicht</b> den Parameter <b>Description</b> , sondern <b>Code</b> für die Auswertung des Transaktionsstatus!
--------------------	-----------	---	---	--

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
ErrorT ext	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .	Fehlertext vom nachgelagerten System, nur wenn dessen Rückgabe mit <a href="#">Computop Helpdesk</a> abgesprochen ist.

Response parameters for reversal of Alipay Spot Payment or QR Code payment

## Credit with reference

Credits for a payment with all Alipay payment scenarios can be made via server-to-server communication. Paygate permits credits that reference on a capture previously made via Paygate. The amount of the credit is limited to the amount of the previous payment.

To carry out a credit with a reference transaction, please use the following URL:

<https://www.computop-paygate.com/credit.aspx>

**Notice:** For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
Merch antID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
PayID	an32	M	ID assigned by Paygate for the payment to be credited
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Amou nt	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
Curren cy	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.

<b>ReqId</b>	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.  Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.  <b>Notice:</b> Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.
--------------	---------	---	--

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment to be credited	Vom Paygate vergebene ID für die gutzuschreibende Zahlung

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: <a href="#">A1 Währungstabelle</a>

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here:  <ul style="list-style-type: none"><li>• <a href="#">HMAC Authentication (Request)</a></li><li>• <a href="#">HMAC Authentication (Notify)</a></li></ul>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier:  <ul style="list-style-type: none"><li>• <a href="#">HMAC-Authentisierung (Anfrage)</a></li><li>• <a href="#">HMAC-Authentisierung (Notify)</a></li></ul>

Key	Format	CND	Description	Beschreibung
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
ReqId	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.  Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.  <b>Notice:</b> Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.	Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück.  Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet.  <b>Hinweis:</b> Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.

Parameters for credits of Alipay payments

The following table describes the result parameters with which the Computop Paygate responds to your system

**i** pls. be prepared to receive additional parameters at any time and do not check the order of parameters

**i** the key (e.g. MerchantId, RefNr) should not be checked case-sensitive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK ( <a href="#">URLSuccess</a> ) or FAILED ( <a href="#">URLFailure</a> )
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
refnr	ns..30	O	Merchant's unique reference number
ErrorText	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK ( <a href="#">URLSuccess</a> ) or FAILED ( <a href="#">URLFailure</a> )	OK ( <a href="#">URLSuccess</a> ) oder FAILED ( <a href="#">URLFailure</a> )

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie <b>nicht</b> den Parameter <b>Description</b> , sondern <b>Code</b> für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Key	Format	CND	Description	Beschreibung
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung

ErrorText	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .	Fehlertext vom nachgelagerten System, nur wenn dessen Rückgabe mit <a href="#">Computop Helpdesk</a> abgesprochen ist.
-----------	---------	---	---	--

Result parameters for credits of Alipay payments

## Status request for Alipay Spot Payment

Status requests are only for payments with Alipay Spot Payment and is possible via a Server-to-Server connection. Paygate permits status requests that reference a payment previously made via Paygate. A status request is needed as soon as the value AUTHORIZE\_REQUEST has been received in response to the deposit of a payment. In this case the customer needs to confirm the payment by entering their password again with the app.

To carry out a status request with a reference transaction, please use the following URL:

<https://www.computop-paygate.com/inquireExt.aspx>

**Notice:** For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: <a href="#">A1 Währungstabelle</a>

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"><li>• <a href="#">HMAC Authentication (Request)</a></li><li>• <a href="#">HMAC Authentication (Notify)</a></li></ul>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: <ul style="list-style-type: none"><li>• <a href="#">HMAC-Authentisierung (Anfrage)</a></li><li>• <a href="#">HMAC-Authentisierung (Notify)</a></li></ul>

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Parameters for status requests of Alipay Spot Payment

The following table describes the result parameters with which the Computop Paygate responds to your system

**i** pls. be prepared to receive additional parameters at any time and do not check the order of parameters

**i** the key (e.g. MerchantId, RefNr) should not be checked case-sentive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
refnr	ns..30	O	Merchant's unique reference number
ErrorText	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK, FAILED or AUTHORIZE_REQUEST (If no final status from Alipay exists. Customers may need to confirm the payment in the app with their password.)	OK, FAILED sowie AUTHORIZE_REQUEST (Wenn noch kein endgültiger Status von Alipay vorliegt. Eventuell muss der Kunde die Zahlung mit seinem Payment-Passwort in der App bestätigen.)

Key	Format	CND	Description	Beschreibung

Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie <b>nicht</b> den Parameter <b>Description</b> , sondern <b>Code</b> für die Auswertung des Transaktionsstatus!
-------------	-----------	---	---	--

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
ErrorT ext	ans..48	O	Error text from the downstream system, only when its response is discussed with <a href="#">Computop Helpdesk</a> .	Fehlertext vom nachgelagerten System, nur wenn dessen Rückgabe mit <a href="#">Computop Helpdesk</a> abgesprochen ist.

Response parameters for status requests of Alipay Spot Payment

## Batch processing via the interface

Basic information about using Batch files and about their structure can be found in the Batch Manager manual. Within batch processing not all functions are available which are usually available for the online interface.

This section describes the parameters which must be transferred within the data set (**Record**) for executing an Alipay payment and information can be found within the response file about the payment status.

Following table gives an overview of all batch versions that are possible for a specific action and their specialities:

Action	Version	Description
Credit	1.0 / 2.0	Standard version without return of parameter Code
	1.x / 2.x	with RefNr (valid for all versions other than 1.0)
Reverse	1.0 / 2.0	Standard version without return of parameter Code
	1.x / 2.x	with RefNr (valid for all versions other than 1.0)

Description of the possible batch versions

The structure for an Alipay payment within a Batch file to be submitted is as follows:

```
HEAD,<MerchantID>,<Date>,<Version>
Alipay,Credit,<Amount>,<Currency>,<TransID>,(<RefNr>,<PayID>
Alipay,Reverse,<Amount>,<Currency>,<TransID>,(<RefNr>,<PayID>
FOOT,<CountRecords>,<SumAmount>
```

Example for Master MID function:

```
HEAD,[Master]MerchantID,Date,2.x
Type,Action,[Slave]MID,Amount,Currency,TransID,Data (depends on Action)
FOOT,CountRecords,SumAmount
```

The following table describes the individual fields and values used within the data set (record) in the batch file:

Key	Format	CND	Description
Type	a..11	M	HEAD for Header, FOOT for Footer, Alipay for Alipay
Action	a..20	M	The parameter Action defines the type of transaction: Credit Reverse (cancellation)
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
PayID	an32	M	ID assigned by Paygate for this transaction

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: <a href="#">A1 Währungstabelle</a>

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for this transaction	Vom Paygate vergebene ID für diese Transaktion

Description of fields within the record for Batch files

The record area within the response file for Batch transactions looks as follows:

```
HEAD,<MerchantID>,<Date>,<Version>
Alipay,Credit,<Amount>,<Currency>,<TransID>,(<RefNr>,<PayID>,<Status>,<Code>
Alipay,Reverse,<Amount>,<Currency>,<TransID>,(<RefNr>,<PayID>,<Status>,<Code>
FOOT,<CountRecords>,<SumAmount>
```

The following table describes the response parameters which the Batch Manager saves in the Record area for each transaction (standard parameters not explained here, such as <TransID> or <RefNR> and request parameters are returned unchanged and correspond to the call as specified before):

Key	Format	CND	Description
Action	a..20	M	The parameter Action defines the type of transaction: Credit Reverse (cancellation)
PayID	an32	M	ID assigned by Paygate for this transaction

Status	a..50	M	OK ( <a href="#">URLSuccess</a> ) or FAILED ( <a href="#">URLFailure</a> )
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for this transaction	Vom Paygate vergebene ID für diese Transaktion

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK ( <a href="#">URLSuccess</a> ) or FAILED ( <a href="#">URLFailure</a> )	OK ( <a href="#">URLSuccess</a> ) oder FAILED ( <a href="#">URLFailure</a> )

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Description of result parameters within the record for Batch files