

Barzahlen

- [About Barzahlen](#)
 - [General information about Barzahlen](#)
 - [Process flow chart](#)
- [Configuration for Barzahlen](#)
- [Paygate interface](#)
 - [Definitions](#)
 - [Data formats](#)
 - [Abbreviations](#)
 - [Call of interface for Barzahlen](#)
 - [Updating a payment](#)
 - [Credit with reference](#)
 - [Reversal](#)
- [Batch processing via the interface](#)

About Barzahlen

General information about Barzahlen

This manual describes configuring and using the Computop interface for Barzahlen:

Barzahlen is aimed at customers in Germany who do not want to enter sensitive data online, and those who do not use credit cards or online banking. An alternative to cash on delivery, Barzahlen is quicker and less expensive. Customers pay the amount to an associated retailer, on the basis of a payment form; the retailer transmits a payment confirmation in real time to the online shop so that the goods can be dispatched quickly.

Barzahlen is a payment provider for cash transactions. Customers use cash to pay for online purchases, travel bookings or diverse invoices. It is also possible to pay by cash to one's own giro account.

The customer receives a barcode via email, SMS or Post to process the payment. This barcode is then scanned at the checkout of an individual partner branch and the customer pays with cash or another permitted payment method. The supplier is notified about payment in real time by the checkout system once the customer has paid. The payment service is carried out by Greensill Bank AG from Bremen.


Currently cash payments are made throughout Germany in over 10,000 branches of the REWE markets, dm-drogerie markets, PENNY markets, real,- supermarkets, Telekom Shops, mobilcom-debitel branches and with Budni chemists and in branches of the Dr. Eckert group.

Cash payments offer users who prefer cash, the option to buy, gamble or to book travel online without entering sensitive financial data. This cash option, means it is the only payment system available to every German without restriction. 68% of Germans over 18 years have no credit card (Deutsche Bundesbank 2015) and 51% do not use online banking (Bundesverband deutscher Banken 2014).

Logo	
Info	With Barzahlen online purchases in Germany at over 10,000 branches of retail partners such as real,- can be paid for in cash. The additional customer potential encompasses amongst other things those Internet users who do not yet purchase online.
Type	Payments by Cash-In / Bill

Further information can be found on the webpage of Barzahlen (<https://www.barzahlen.de/de/>).

Process flow chart

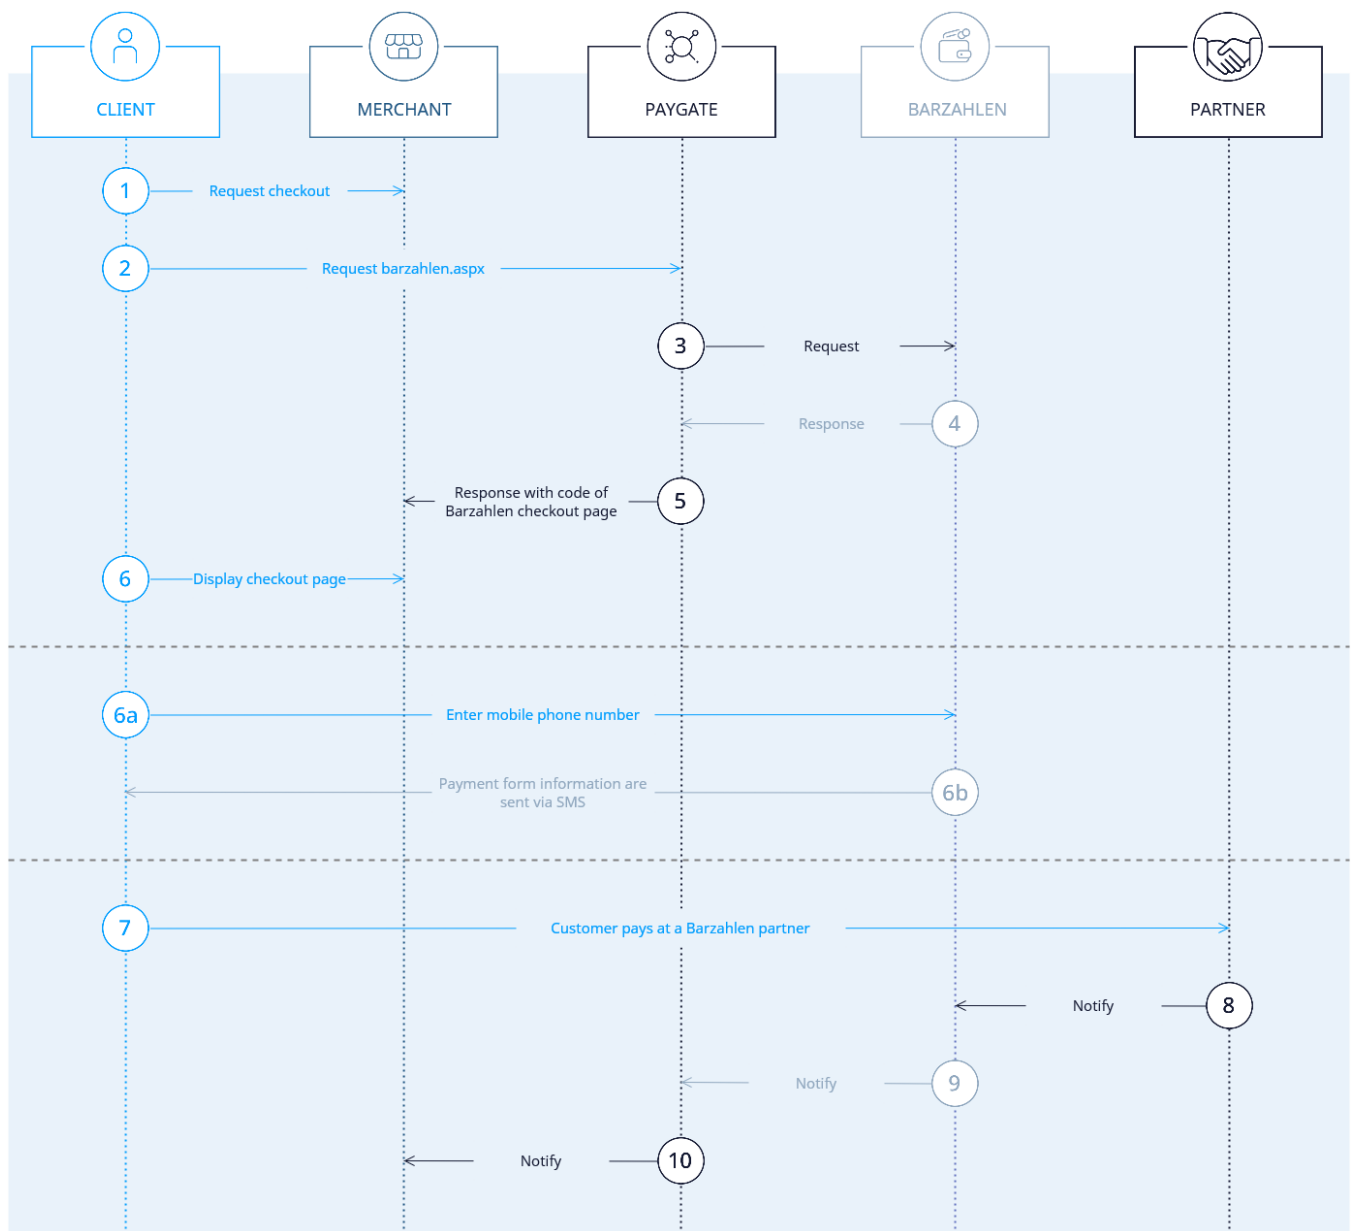

Barzahlen process flow

Configuration for Barzahlen


Merchants need to initially setup an account with Barzahlen on their webpage: <https://controlcenter.barzahlen.de/#/account/signin>

You start configuration once you have logged on.

In the cash payment Control Center you need to enter the following URLs under Settings / Divisions (<https://controlcenter.barzahlen.de/#/settings/divisions>).

Notification URL: <https://www.computop-paygate.com/BarzahlenComplete.aspx>

Sandbox notification URL: <https://www.computop-paygate.com/BarzahlenComplete.aspx>

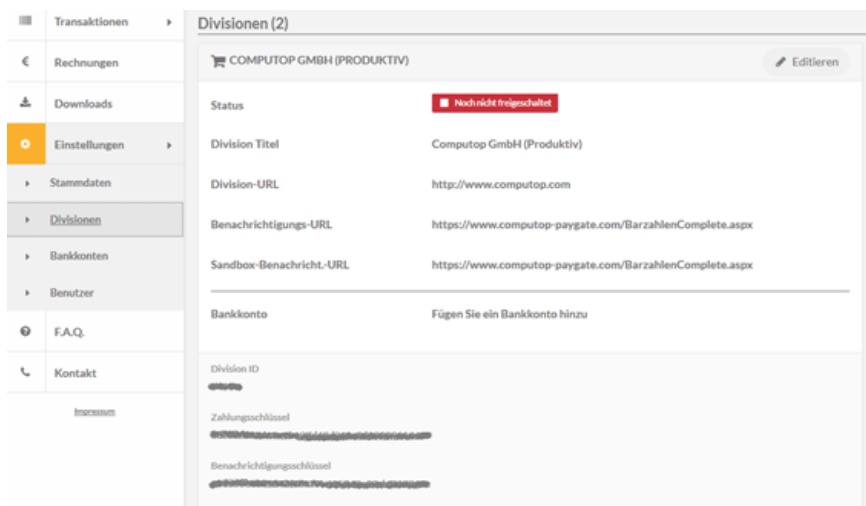

You must send the division-ID together with the payment key to the Computop Support at [Computop Helpdesk](#), in order to activate this payment method within your MID on Paygate.

Paygate interface

Definitions

Data formats

Format	Description
a	alphabetical
as	alphabetical with special characters
n	numeric
an	alphanumeric
ans	alphanumeric with special characters
ns	numeric with special characters
bool	boolean expression (true or false)
3	fixed length with 3 digits/characters
..3	variable length with maximum 3 digits/characters
enum	enumeration of allowed values
dtm	ISODateTime (YYYY-MM-DDThh:mm:ss)

Abbreviations

Abbreviation	Description	Comment
CND	condition	
M	mandatory	If a parameter is mandatory, then it must be present
O	optional	If a parameter is optional, then it can be present, but it is not required
C	conditional	If a parameter is conditional, then there is a conditional rule which specifies whether it is mandatory or optional

Notice: Please note that the names of parameters can be returned in upper or lower case.

Call of interface for Barzahlen

To carry out a Barzahlen payment via a Server-to-Server connection, please use the following URL:

<https://www.computop-paygate.com/barzahlen.aspx>

Notice: For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)
URLNotify	ans..256	M	Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the UserData parameter instead. i Common notes: - We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate - However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLSuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
OrderDesc	ans..512	M	Description of purchased goods, unit prices etc. The first 50 characters appear in the merchant's settlement file. You can view the full data in the list within Computop Analytics.
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.
CustomerID	ans..80	C	Customer ID or customer number. If this value is not transmitted, the email address must be transmitted.
Email	ans..80	C	Email address of the customer. If this value is not transmitted, the CustomerID must be transmitted.
Street	ans..60	O	Customer's street and street number to find the nearest points of acceptance
ZIP	ans..10	O	Customer's post code to find the nearest points of acceptance
City	ans..50	O	Customer's city/town to find the nearest points of acceptance
CountryCode	a2	O	Country code according to ISO 3166. The default is DE.

Language	a5	O	5-digit language code which impacts the language of the payment form and the response parameters. The default is de-DE.
Expiration	n..4	O	Validity of payment form in days. The default validity period of the payment form can also be provided within the Barzahlen backend.
Mobile No	ans..50	O	Customer's mobile phone number with country code. e.g. +49151123456789
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the "I" is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den Computop Helpdesk , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: A1 Währungstabelle

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: HMAC-Authentisierung (Anfrage) HMAC-Authentisierung (Notify)

Key	Format	CND	Description	Beschreibung
URLNotify	ans..256	M	Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the UserData parameter instead.  Common notes: - We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate - However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLSuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.	Vollständige URL, die das Paygate aufruft, um den Shop zu benachrichtigen. Die URL darf nur über Port 443 aufgerufen werden. Sie darf keine Parameter enthalten: Nutzen Sie stattdessen den Parameter UserData .  Allgemeine Hinweise: - Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten - Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLSuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.

Key	Format	CND	Description	Beschreibung
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

Order Desc	ans..512	M	Description of purchased goods, unit prices etc. The first 50 characters appear in the merchant's settlement file. You can view the full data in the list within Computop Analytics.	Beschreibung der gekauften Waren, Einzelpreise etc. Die ersten 50 Zeichen erscheinen auf dem Settlement File des Händlers. In der Liste inComputop Analytics können Sie die kompletten Daten einsehen.
------------	----------	---	--	--

Key	Format	CND	Description	Beschreibung
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.	Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück. Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einem Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet. Hinweis: Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.

Key	Format	CND	Description	Beschreibung
CustomerID	ans..80	C	Customer ID or customer number. If this value is not transmitted, the email address must be transmitted.	Kunden-ID oder Kundennummer. Wird kein Wert übergeben, muss die E-Mail-Adresse übergeben werden.
Email	ans..80	C	Email address of the customer. If this value is not transmitted, the CustomerID must be transmitted.	E-Mail-Adresse des Kunden. Wird kein Wert übergeben, muss die CustomerID übergeben werden.
Street	ans..60	O	Customer's street and street number to find the nearest points of acceptance	Straße und Hausnummer des Kunden zur Ermittlung der nächstgelegenen Annahmestellen
ZIP	ans..10	O	Customer's post code to find the nearest points of acceptance	Postleitzahl des Kunden zur Ermittlung der nächstgelegenen Annahmestellen
City	ans..50	O	Customer's city/town to find the nearest points of acceptance	Wohnort des Kunden zur Ermittlung der nächstgelegenen Annahmestellen
CountryCode	a2	O	Country code according to ISO 3166. The default is DE.	Ländercode zweistellig gemäß ISO 3166. Standard ist DE.
Language	a5	O	5-digit language code which impacts the language of the payment form and the response parameters. The default is de-DE.	5-stelliger Sprachcode, beeinflusst die Sprache des Zahlscheins und der Antwort-Parameter, Standard ist de-DE.
Expiration	n..4	O	Validity of payment form in days. The default validity period of the payment form can also be provided within the Barzahlen backend.	Gültigkeit des Zahlscheins in Tagen. Die Standard-Gültigkeit eines Zahlscheins kann auch im Barzahlen-BackEnd hinterlegt werden.
Mobile No	ans..50	O	Customer's mobile phone number with country code. e.g. +49151123456789	Mobiltelefonnummer des Kunden mit Landesvorwahl. z.B. +49151123456789

Key	Format	CND	Description	Beschreibung
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.	Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID. Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt.

Key	Format	CND	Description	Beschreibung
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the "I" is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom	Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt. Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird "I" durch "&" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück. Hier finden Sie ein Beispiel: Custom

Parameters for payments with Barzahlen

The following table describes the result parameters with which the Computop Paygate responds to your system

 pls. be prepared to receive additional parameters at any time and do not check the order of parameters

 the key (e.g. MerchantId, RefNr) should not be checked case-sensitive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Status	a..50	M	AUTHORIZE_REQUEST or FAILED
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)
CodeExt	n..10	O	Detailed error code from Barzahlen. <u>Notice:</u> Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .
ErrorText	ans..256	O	Detailed error message from Barzahlen. <u>Notice:</u> Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
TokenExt	ans..255	M	Token to display the Barzahlen checkout page
TransactionID	ans..50	M	ID for identification of payment form
ExpirationNotice	dtm	M	Expiration date of the payment form
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
Status	a..50	M	AUTHORIZE_REQUEST or FAILED	AUTHORIZE_REQUEST oder FAILED

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter Description , sondern Code für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)	Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes)

Key	Format	CND	Description	Beschreibung
CodeExt	n..10	O	Detailed error code from Barzahlen. Notice: Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .	Detaillierter Fehlercode von Barzahlen. Hinweis: Wird nur bei Status=FAILED zurückgegeben. Nutzung nur in Abstimmung mit dem Computop Helpdesk möglich.
ErrorText	ans..256	O	Detailed error message from Barzahlen. Notice: Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .	Detaillierte Fehlermeldung von Barzahlen. Hinweis: Wird nur bei Status=FAILED zurückgegeben. Nutzung nur in Abstimmung mit dem Computop Helpdesk möglich.

Key	Format	CND	Description	Beschreibung
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
TokenExt	ans..255	M	Token to display the Barzahlen checkout page	Token um die Checkout-Seite von Barzahlen anzuzeigen
TransactionID	ans..50	M	ID for identification of payment form	ID zur Identifizierung des Zahlscheins
ExpirationNotice	dtm	M	Expiration date of the payment form	Ablaufdatum des Zahlscheins

Key	Format	CND	Description	Beschreibung
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.	Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID. Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt.

Key	Format	CND	Description	Beschreibung
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom	Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt. Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird " " durch "&" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück. Hier finden Sie ein Beispiel: Custom

Response parameters for payments with Barzahlen

The following table gives the results parameters which the Paygate transfers to your URLNotify:

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)
CodeExt	n..10	O	Detailed error code from Barzahlen. <u>Notice:</u> Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .
ErrorText	ans..256	O	Detailed error message from Barzahlen. <u>Notice:</u> Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
TransactionID	ans..50	M	ID for identification of payment form
ExpirationNotice	dtm	M	Expiration date of the payment form
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)	OK (URLSuccess) oder FAILED (URLFailure)

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter Description , sondern Code für die Auswertung des Transaktionsstatus!
-----------------------------	-----------	---	--	--

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)	Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes)

Key	Format	CND	Description	Beschreibung
CodeExt	n..10	O	Detailed error code from Barzahlen. Notice: Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .	Detaillierter Fehlercode von Barzahlen. Hinweis: Wird nur bei Status=FAILED zurückgegeben. Nutzung nur in Abstimmung mit dem Computop Helpdesk möglich.
ErrorText	ans..256	O	Detailed error message from Barzahlen. Notice: Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .	Detaillierte Fehlermeldung von Barzahlen. Hinweis: Wird nur bei Status=FAILED zurückgegeben. Nutzung nur in Abstimmung mit dem Computop Helpdesk möglich.

Key	Format	CND	Description	Beschreibung
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
TransactionID	ans..50	M	ID for identification of payment form	ID zur Identifizierung des Zahlscheins
ExpirationNotice	dtm	M	Expiration date of the payment form	Ablaufdatum des Zahlscheins

Key	Format	CND	Description	Beschreibung
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.	Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID. Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt.

Key	Format	CND	Description	Beschreibung
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom	Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt. Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird " " durch "&" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück. Hier finden Sie ein Beispiel: Custom

Response parameters for URLNotify with Barzahlen

The merchant has to implement the following code on his page in order to display the Barzahlen checkout page.

```
<!-- Barzahlen Checkout -->
<script src=https://cdn.barzahlen.de/js/v2/checkout.js
      class="bz-checkout"
      data-token="CHECKOUT_TOKEN">
</script>
<!-- End Barzahlen Checkout -->
```

The value of the Checkout_Token is transferred by Computop in the **TokenExt** parameter.

The src value must contain the following values for test and productive transactions:

Test: <https://cdn.barzahlen.de/js/v2/checkout-sandbox.js>

Productive: <https://cdn.barzahlen.de/js/v2/checkout.js>

Updating a payment

To update a Barzahlen payment via a Server-to-Server connection, please use the following URL:

<https://www.computop-paygate.com/barzahlenUpdate.aspx>

Notice: For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)
Resending a payment form			
EventToken	a1	M	R = Resend
DistributionType	ans..5	O	Delivery method of payment form for resending. Possible values: Email, Phone; default is Email. When resending a payment form for credits always an email is sent to the customer.
Updating a payment form			
EventToken	a1	M	U = Update
Amount	n..10	OC	Amount in the smallest currency unit (e.g. EUR Cent). Not for credits.
MobileNo	ans..50	OC	Customer's new mobile telephone number. Not for credits.
Email	ans..255	OC	New email address of the customer. Not for credits
Expiration	n..4	O	New validity of payment form in days. Updating the validity of a payment form.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: HMAC-Authentisierung (Anfrage) HMAC-Authentisierung (Notify)

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

			Resending a payment form	Erneutes Sendes des Zahlscheins
EventToken	a1	M	R = Resend	R = Resend
DistributionType	ans..5	O	Delivery method of payment form for resending. Possible values: Email, Phone; default is Email. When resending a payment form for credits always an email is sent to the customer.	Auslieferungsart des Zahlscheins beim erneuten Senden. Mögliche Werte: Email, Phone; Standard ist Email. Beim erneuten Senden eines Zahlscheins für Gutschriften wird immer eine E-Mail an den Kunden gesendet.
			Updating a payment form	Aktualisieren eines Zahlscheins
EventToken	a1	M	U = Update	U = Update
Amount	n..10	OC	Amount in the smallest currency unit (e.g. EUR Cent). Not for credits.	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Nicht bei Gutschriften.
MobileNo	ans..50	OC	Customer's new mobile telephone number. Not for credits.	Neue Mobiltelefonnummer des Kunden. Nicht bei Gutschriften.
Email	ans..255	OC	New email address of the customer. Not for credits	Neue E-Mail-Adresse des Kunden. Nicht bei Gutschriften.
Expiration	n..4	O	New validity of payment form in days. Updating the validity of a payment form.	Neue Gültigkeit des Zahlscheins in Tagen. Aktualisierung der Gültigkeit eines Zahlscheins.

Parameters for updating a payment with Barzahlen

The following table describes the result parameters with which the Computop Paygate responds to your system

 pls. be prepared to receive additional parameters at any time and do not check the order of parameters

 the key (e.g. MerchantId, RefNr) should not be checked case-sensitive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)
CodeExt	ans..10	O	Detailed error code from Barzahlen. <u>Notice:</u> Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .
ErrorText	ans..1024	O	Detailed error message from Barzahlen. <u>Notice:</u> Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .
TransactionID	ans..50	M	ID for identification of payment form
ExpirationNotice	dtm	M	Expiration date of the payment form

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)	OK (URLSuccess) oder FAILED (URLFailure)

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter Description , sondern Code für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)	Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes)

Key	Format	CND	Description	Beschreibung
CodeExt	ans..10	O	Detailed error code from Barzahlen. <i>Notice:</i> Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .	Detaillierter Fehlercode von Barzahlen. <i>Hinweis:</i> Wird nur bei Status=FAILED zurückgegeben. Nutzung nur in Abstimmung mit dem Computop Helpdesk möglich.
ErrorText	ans..1024	O	Detailed error message from Barzahlen. <i>Notice:</i> Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk .	Detaillierte Fehlermeldung von Barzahlen. <i>Hinweis:</i> Wird nur bei Status=FAILED zurückgegeben. Nutzung nur in Abstimmung mit dem Computop Helpdesk möglich.
TransactionID	ans..50	M	ID for identification of payment form	ID zur Identifizierung des Zahlscheins
ExpirationNotice	dtm	M	Expiration date of the payment form	Ablaufdatum des Zahlscheins

Response parameters for updating of Barzahlen

Credit with reference

Credits (refunds) are possible via a Server-to-Server connection. To carry out a credit with a reference transaction, please use the following URL:

<https://www.computop-paygate.com/credit.aspx>

Notice: For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table

MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)
Order Desc	ans..768	O	Description of refunded goods, unit prices, merchant's comment etc.
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den Computop Helpdesk , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: A1 Währungstabelle

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: HMAC-Authentisierung (Anfrage) HMAC-Authentisierung (Notify)

Key	Format	CND	Description	Beschreibung
OrderDesc	ans..768	O	Description of refunded goods, unit prices, merchant's comment etc.	Beschreibung der gutgeschriebenen Artikel, Einzelpreise, Händlerkommentar etc.

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.	Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück. Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einem Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet. Hinweis: Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.
-------	---------	---	---	--

Parameters for credits of Barzahlen payments

The following table describes the result parameters with which the Computop Paygate responds to your system

 pls. be prepared to receive additional parameters at any time and do not check the order of parameters

 the key (e.g. MerchantId, RefNr) should not be checked case-sentive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)	OK (URLSuccess) oder FAILED (URLFailure)

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter Description , sondern Code für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)	Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes)
------	----	---	---	---

Result parameters for credits of Barzahlen payments

Reversal

In order to cancel a Barzahlen payment via a server-to-server communication, please go to the following URL:

<https://www.computop-paygate.com/reverse.aspx>

Notice: Reverse.aspx does not only reverse authorisations, but any LAST TRANSACTION STAGE! If the last transaction was a capture, Reverse.aspx initiates the reverse, e.g. a credit. Therefore, the utmost caution is urged. Use is at your own risk. We recommend checking the transaction status with Inquire.aspx before using Reverse.aspx.

Notice: For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den Computop Helpdesk , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: A1 Währungstabelle

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: HMAC Authentication (Request) HMAC Authentication (Notify)	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: HMAC-Authentisierung (Anfrage) HMAC-Authentisierung (Notify)

Key	Format	CND	Description	Beschreibung
ReqID	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.	Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück. Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einem Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet. Hinweis: Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.

Parameters for reversals of Barzahlen payments

The following table describes the result parameters with which the Computop Paygate responds to your system

 pls. be prepared to receive additional parameters at any time and do not check the order of parameters

 the key (e.g. MerchantID, RefNr) should not be checked case-sentive

Key	Format	CND	Description
mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss
---------	---------	---	---	--

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)	OK (URLSuccess) oder FAILED (URLFailure)

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter Description , sondern Code für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)	Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes)

Result parameters for reversals of Barzahlen payments

Batch processing via the interface

Basic information about using Batch files and about their structure can be found in the Batch Manager manual. Within batch processing not all functions are available which are usually available for the online interface.

This section describes the parameters which must be transferred within the data set (**Record**) for executing reversals or credits with Barzahlen and which information can be found within the response file about the payment status.

For Batch calls there must be considered batch versions, from which optional parameters depend. All version designations starting with „2.“ pertain calls for a group of enterprises. That means within a batch file for a particular MerchantID can be transferred transactions for other merchants with a separate Sub-MID.

Following table gives an overview of all batch versions that are possible for a specific action and their specialities:

Action	Version	Description
Credit	1.0 / 2.0	Standard version without return of parameter Code
	1.x / 2.x	with RefNr (valid for all versions other than 1.0)
Reverse	1.0 / 2.0	Standard version without return of parameter Code
	1.x / 2.x	with RefNr (valid for all versions other than 1.0)

Description of the possible batch versions

The structure for a Barzahlen payment within a Batch file to be submitted is the following:

```
HEAD,<MerchantID>,<Date>,<Version>
Barzahlen,Credit,<Amount>,<Currency>,<TransID>,( <RefNr>,<PayID>
Barzahlen,Reverse,<Amount>,<Currency>,<TransID>,( <RefNr>,<PayID>
FOOT,<CountRecords>,<SumAmount>
```

Example for Master MID function:

```
HEAD,[Master]MerchantID,Date,2.x
Type,Action,[Slave]MID,Amount,Currency,TransID,Data (depends on Action)
FOOT,CountRecords,SumAmount
```

The following table describes the individual fields and values used within the data set (record) in the batch file:

Key	Format	CND	Description
Type	a..11	M	HEAD for Header, FOOT for Footer, Barzahlen for Barzahlen
Action	a..20	M	The parameter Action defines the type of transaction: Credit Reverse (cancellation)
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ns..30	O	Merchant's unique reference number
PayID	an32	M	ID assigned by Paygate for this transaction

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den Computop Helpdesk , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: A1 Währungstabelle

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ns..30	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for this transaction	Vom Paygate vergebene ID für diese Transaktion

Description of fields within the record for Batch files

The record area within the response file for Batch transactions looks the following way:

```
HEAD,<MerchantID>,<Date>,<Version>
Barzahlen,Credit,<Amount>,<Currency>,<TransID>,( <RefNr>,<PayID>,<Status>,<Code>
Barzahlen,Reverse,<Amount>,<Currency>,<TransID>,( <RefNr>,<PayID>,<Status>,<Code>
FOOT,<CountRecords>,<SumAmount>
```

The following table describes the response parameters which the Batch Manager saves in the Record area for each transaction (standard parameters not explained here, such as <TransID> or <RefNr> and request parameters are returned unchanged and correspond to the call as specified before):

Key	Format	CND	Description
Action	a..20	M	The parameter Action defines the type of transaction: Credit Reverse (cancellation)
PayID	an32	M	ID assigned by Paygate for this transaction

Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for this transaction	Vom Paygate vergebene ID für diese Transaktion

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK (URLSuccess) or FAILED (URLFailure)	OK (URLSuccess) oder FAILED (URLFailure)

Key	Format	CND	Description	Beschreibung
Code	n8	M	Error code according to Paygate Response Codes (A4 Error codes)	Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes)

Description of result parameters within the record for Batch files