

eps

- About eps
 - General information about eps
 - Process flow chart
- Paygate interface
 - Definitions
 - Data formats
 - Abbreviations
 - Calling the eps interface
 - Credit with reference
- Batch processing via the interface

About eps

General information about eps


In Austria Computop Paygate supports online money transfer with the Austrian Electronic Payment Standard (EPS). EPS is an established system for e-commerce payments in Austria offering a payment guarantee to the merchant. The customer can use the familiar and trusted online banking of its own credit institution, just the same as with online banking.

With online banking, the data disclosed in the online transfer is encrypted with SSL (Secure Sockets Layer) to prevent manipulation.

| | |
|-------------|--|
| Logo |  The logo for EPS Überweisung features a stylized red 'e' shape that also forms the top of a lock icon. To the right of the 'e' is the word 'eps' in a bold, lowercase, sans-serif font. Below 'eps' is the word 'Überweisung' in a smaller, regular, sans-serif font. |
| Info | In Austria the online bank transfer with eps is very widespread in E-commerce and thus an interesting addition to the payment mix. Additionally the merchant gets a payment guarantee. |
| Type | Payments by Online Bank Transfer |

Further information can be found on the webpage of eps (<https://eps-ueberweisung.at/>).

Process flow chart

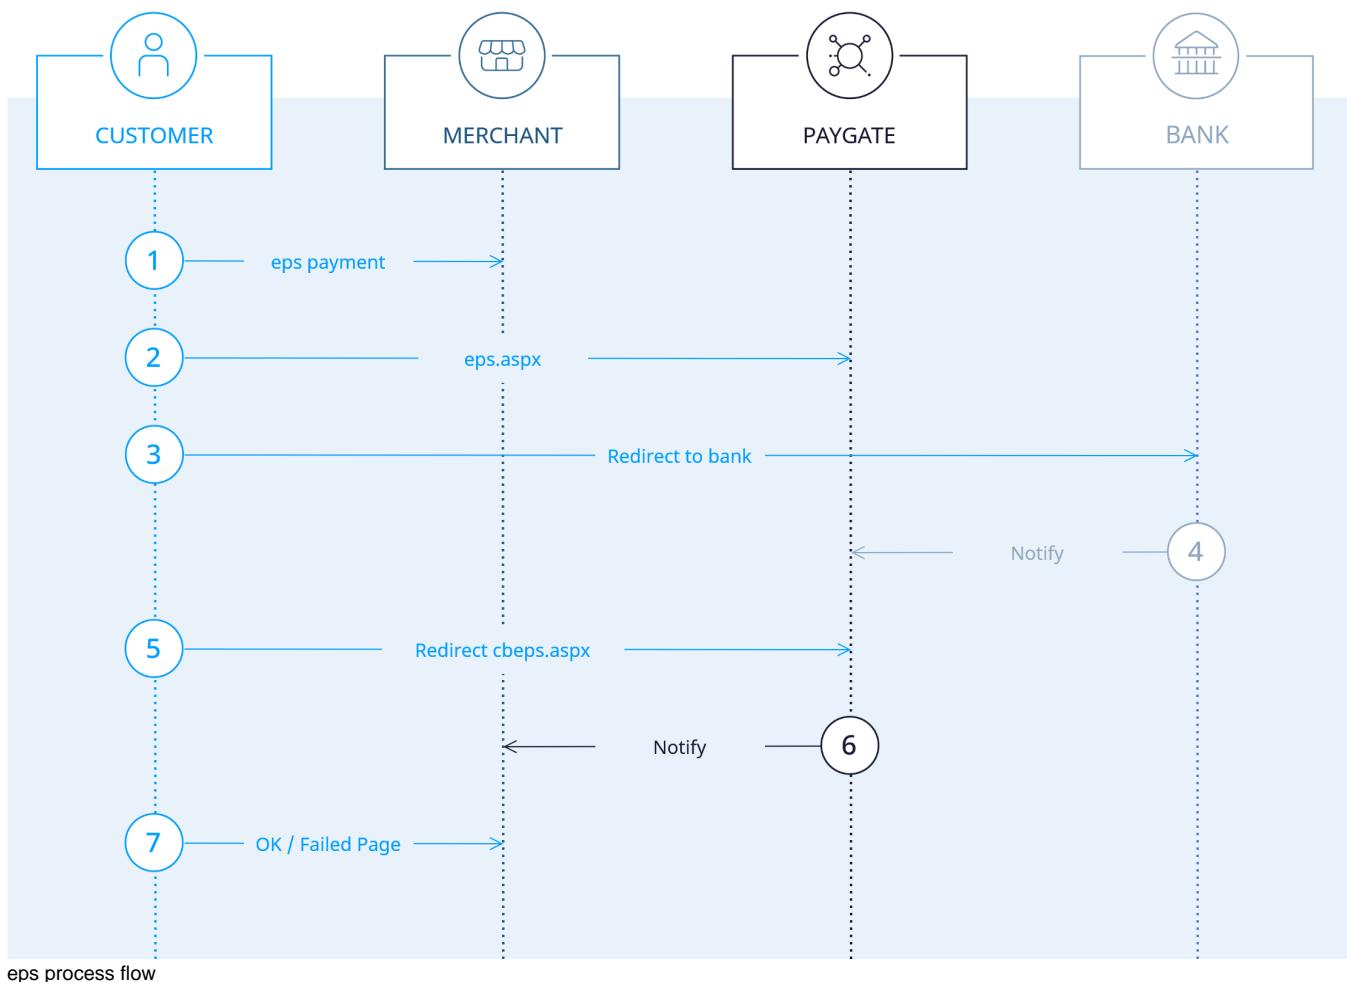

Paygate interface

Definitions

Data formats

| Format | Description |
|--------|--|
| a | alphabetical |
| as | alphabetical with special characters |
| n | numeric |
| an | alphanumeric |
| ans | alphanumeric with special characters |
| ns | numeric with special characters |
| bool | boolean expression (true or false) |
| 3 | fixed length with 3 digits/characters |
| ..3 | variable length with maximum 3 digits/characters |
| enum | enumeration of allowed values |
| dttm | ISODateTime (YYYY-MM-DDThh:mm:ss) |

Abbreviations

| Abbreviation | Description | Comment |
|--------------|-------------|---|
| CND | condition | |
| M | mandatory | If a parameter is mandatory, then it must be present |
| O | optional | If a parameter is optional, then it can be present, but it is not required |
| C | conditional | If a parameter is conditional, then there is a conditional rule which specifies whether it is mandatory or optional |

Notice: Please note that the names of parameters can be returned in upper or lower case.

Calling the eps interface

The eps connection with a Paygate form can be either direct or via PPRO, where the interface form and process are largely identical. With the PPRO connection there are a few added parameters which are explained separately in the table. Subsequent credits and batch transfer credits can only be made with the PPRO connection.

To make a payment in Austria with eps online transfer via a Paygate form, please use the following URL:

<https://www.computop-paygate.com/eps.aspx>

Notice: For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Notice: An eps connection via iFrame is not possible due to eps regulations and will be prevented technically.

| Key | REST | Format | CND | Description |
|-------------|--|----------|-----|--|
| Merch antID | BasicAuth. Username | ans..30 | M | MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too. |
| TransID | "transactionId": "..." | ans..64 | M | TransactionID provided by you which should be unique for each payment |
| RefNr | "referenceNumber": "..." | ns..30 | M | Unique reference number. In case of PPRO: Only characters a-zA-Z0-9,-_ are allowed, format ans..40. |
| Amou nt | "amount": { "value": ...}} | n..10 | M | Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit). |
| Curren cy | "amount": { "currency": "..."}} | a3 | M | Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table |
| Option Date | "payment": { "eps": {"desiredPayme ntExecutionDat e": "..."}}} | ans10 | OC | Not with PPRO: desired payment execution date in the format YYYY-MM-DD |
| Order Desc | "order": { "description [0]": "..."}} | ans..768 | M | Intended use on statement of account (max 35 digits) With PPRO: Description of purchased goods, unit prices etc. |
| Order Desc2 | "order": { "description [1]": "..."}} | ans..384 | C | Not with PPRO: Number and description of purchased products, individual prices, comma-separated list, no special characters allowed |
| AccO wner | "payment": { "eps": {"account": {"accountHole dr": "..."}}} | ans3..50 | OC | Obligatory for PPRO: Name of account holder |

| | | | | |
|---------------|---|-----------|----|--|
| IBAN | "payment": {"eps": {"account": {"number": "..."}}} | ans..34 | OC | Obligatory for PPRO: International Bank Account Number for SEPA |
| BIC | "payment": {"eps": {"account": {"code": "..."}}} | ans..11 | OC | Obligatory for PPRO: Bank Identifier Code for SEPA |
| MAC | --- | an64 | M | Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> • HMAC Authentication (Request) • HMAC Authentication (Notify) |
| UserD ata | "metadata [userData]": "..." | ans..1024 | O | If specified at request, Paygate forwards the parameter with the payment result to the shop. |
| URLS uccess | "urls": {"success": "..."} Common notes: <ul style="list-style-type: none"> • We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate • However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful. | ans..256 | M | Complete URL which calls up Paygate if payment has been successful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter UserData . |
| URLF ailure | "urls": {"failure": "..."} Common notes: <ul style="list-style-type: none"> • We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate • However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success /failure of the action. Only a result of "code=00000000" should be considered successful. | ans..256 | M | Complete URL which calls up Paygate if payment has been unsuccessful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter UserData . |
| Respo nse | --- | a7 | O | Status response sent by Paygate to URLSuccess and URLFailure , should be encrypted. For this purpose, transmit Response=encrypt parameter. |
| URLN otify | "urls": {"notify": "..."} Common notes: <ul style="list-style-type: none"> • We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate • However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success /failure of the action. Only a result of "code=00000000" should be considered successful. | ans..256 | M | Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the UserData parameter instead. |
| ReqId | "requestId": "..." To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication/authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate. | ans..32 | O | |
| Selling Point | "payment": {"eps": {"sellingPoint": "..."}} | ans..50 | C | Only with PPRO: Selling point |
| Service | "payment": {"eps": {"service": "..."}} | ans..50 | C | Only with PPRO: products or service sold |
| Chann el | "channel": {"code": "..."} Only with PPRO: configuration channel of the PPRO contract (account and ContractID are stored in the system). If it exists, it may overwrite channels stored in the system | ans..64 | OC | |
| Lang uage | "language": "..." Only with PPRO: 2-letter language code (e.g.. de) that should be preferred when presenting payment pages to the consumer | a2 | O | |
| Plain | "metadata [plain)": "..." A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation. | ans..50 | O | |

| | | | | |
|--------|-------------------|-----------|---|---|
| Custom | "metadata": "..." | ans..1024 | O | <p>"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.</p> <p>The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.</p> <p>Please find a samples here: Custom</p> |
|--------|-------------------|-----------|---|---|

| Key | REST | Format | CND | Description | Beschreibung |
|---------|------------------------|---------|-----|---|--|
| TransID | "transactionId": "..." | ans..64 | M | TransactionID provided by you which should be unique for each payment | Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss |

| Key | REST | Format | CND | Description | Beschreibung |
|-------|--------------------------|--------|-----|---|---|
| RefNr | "referenceNumber": "..." | ns..30 | M | <p>Unique reference number.</p> <p>In case of PPRO: Only characters a-zA-Z0-9,-_ are allowed, format ans..40.</p> | <p>Eindeutige Referenznummer.</p> <p>Bei PPRO: Nur die Zeichen a-zA-Z0-9,-_ sind erlaubt, Format ans..40.</p> |

| Key | REST | Format | CND | Description | Beschreibung |
|--------|--------------------------|--------|-----|--|---|
| Amount | "amount": {"value": ...} | n..10 | M | Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit). | Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den Computop Helpdesk , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten. |

| Key | REST | Format | CND | Description | Beschreibung |
|----------|-------------------------------|--------|-----|--|---|
| Currency | "amount": {"currency": "..."} | a3 | M | Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table | Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: A1 Währungstabelle |

| Key | REST | Format | CND | Description | Beschreibung |
|-------------|--|----------|-----|---|--|
| Option Date | "payment": {"eps": {"desiredPaymentExecutionDate": "..."}}} | ans10 | OC | Not with PPRO: desired payment execution date in the format YYYY-MM-DD | Nicht bei PPRO: gewünschter Ausführungstermin der Zahlung im Format JJJJ-MM-TT |
| Order Desc | "order": {"description [0]": "..."} With PPRO: Description of purchased goods, unit prices etc. | ans..768 | M | <p>Intended use on statement of account (max 35 digits)</p> <p>With PPRO: Description of purchased goods, unit prices etc.</p> | <p>Verwendungszweck auf dem Kontoauszug (hier nur 35 Zeichen)</p> <p>Bei PPRO: Beschreibung der gekauften Waren, Einzelpreise usw.</p> |
| Order Desc2 | "order": {"description [1]": "..."} With PPRO: Number and description of purchased products, individual prices, comma-separated list, no special characters allowed | ans..384 | C | Not with PPRO: Number and description of purchased products, individual prices, comma-separated list, no special characters allowed | nicht bei PPRO: Anzahl u. Beschreibung der gekauften Waren, Einzelpreise; kommaseparierte Liste, keine Sonderzeichen erlaubt |
| AccOwner | "payment": {"eps": {"account": {"accountHolder": "..."}}} | ans3..50 | OC | Obligatory for PPRO: Name of account holder | bei PPRO Pflicht: Name des Kontoinhabers |
| IBAN | "payment": {"eps": {"account": {"number": "..."}}} | ans..34 | OC | Obligatory for PPRO: International Bank Account Number for SEPA | bei PPRO Pflicht: International Bank Account Number für SEPA |
| BIC | "payment": {"eps": {"account": {"code": "..."}}} | ans..11 | OC | Obligatory for PPRO: Bank Identifier Code for SEPA | bei PPRO Pflicht: Bank Identifier Code für SEPA |

| Key | REST | Format | CND | Description | Beschreibung |
|-----|------|--------|-----|---|--|
| MAC | --- | an64 | M | <p>Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here:</p> <ul style="list-style-type: none"> • HMAC Authentication (Request) • HMAC Authentication (Notify) | <p>Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier:</p> <ul style="list-style-type: none"> • HMAC-Authentisierung (Anfrage) • HMAC-Authentisierung (Notify) |

| Key | REST | Format | CND | Description | Beschreibung |
|-----------|------------------------------|-----------|-----|--|--|
| UserD ata | "metadata [userData)": "..." | ans..1024 | O | If specified at request, Paygate forwards the parameter with the payment result to the shop. | Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop. |

| Key | REST | Format | CND | Description | Beschreibung |
|------------|-------------------------------------|----------|-----|--|--|
| URLSuccess | "urls": {"success": ": "..."} | ans..256 | M | <p>Complete URL which calls up Paygate if payment has been successful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter UserData.</p> <p>i Common notes:</p> <ul style="list-style-type: none"> We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful. | <p>Vollständige URL, die das Paygate aufruft, wenn die Zahlung erfolgreich war. Die URL darf nur über Port 443 aufgerufen werden. Diese URL darf keine Parameter enthalten: Um Parameter durchzutragen nutzen Sie stattdessen den Parameter UserData.</p> <p>i Allgemeine Hinweise:</p> <ul style="list-style-type: none"> Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden. |

| Key | REST | Format | CND | Description | Beschreibung |
|------------|-------------------------------------|----------|-----|--|---|
| URLFailure | "urls": {"failure": ": "..."} | ans..256 | M | <p>Complete URL which calls up Paygate if payment has been unsuccessful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter UserData.</p> <p>i Common notes:</p> <ul style="list-style-type: none"> We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful. | <p>Vollständige URL, die das Paygateaufruft, wenn die Zahlung gescheitert ist. Die URL darf nur über Port 443 aufgerufen werden. Diese URL darf keine Parameter enthalten: Um Parameter durchzutragen nutzen Sie stattdessen den Parameter UserData.</p> <p>i Allgemeine Hinweise:</p> <ul style="list-style-type: none"> Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden. |

| Key | REST | Format | CND | Description | Beschreibung |
|----------|------|--------|-----|--|---|
| Response | --- | a7 | O | Status response sent by Paygate to URLSuccess and URLFailure , should be encrypted. For this purpose, transmit Response=encrypt parameter. | Die Status-Rückmeldung, die das Paygate an URLSuccess und URLFailure sendet, sollte verschlüsselt werden. Dazu übergeben Sie den Parameter Response=encrypt . |

| Key | REST | Format | CND | Description | Beschreibung |
|-----------|------------------------------------|----------|-----|---|---|
| URLNotify | "urls": {"notify": ": "..."} | ans..256 | M | <p>Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the UserData parameter instead.</p> <p>i Common notes:</p> <ul style="list-style-type: none"> We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful. | <p>Vollständige URL, die das Paygate aufruft, um den Shop zu benachrichtigen. Die URL darf nur über Port 443 aufgerufen werden. Sie darf keine Parameter enthalten: Nutzen Sie stattdessen den Parameter UserData.</p> <p>i Allgemeine Hinweise:</p> <ul style="list-style-type: none"> Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden. |

| Key | REST | Format | CND | Description | Beschreibung |
|-------|-------------------------|---------|-----|---|--|
| ReqId | "requestId": ": ..." | ans..32 | O | <p>To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.</p> <p>Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.</p> <p>Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.</p> | <p>Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück.</p> <p>Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet.</p> <p>Hinweis: Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.</p> |

| Key | REST | Format | CND | Description | Beschreibung |
|---------------|--|---------|-----|--|---|
| Selling Point | "payment": {"eps": {"sellingPoint": "..."}}} | ans..50 | C | Only with PPRO: Selling point | Nur bei PPRO: Verkaufsstelle |
| Service | "payment": {"eps": {"service": "..."}}} | ans..50 | C | Only with PPRO: products or service sold | Nur bei PPRO: verkaufte Produkte oder Dienstleistungen |
| Channel | "channel": {"code": "...”}} | ans..64 | OC | Only with PPRO: configuration channel of the PPRO contract (account and ContractID are stored in the system). If it exists, it may overwrite channels stored in the system | Nur bei PPRO: Konfigurationskanal des PPRO-Vertrags (Account und ContractID sind im System hinterlegt). Wenn vorhanden, überschreibt er eventuell im System hinterlegten Channel. |
| Language | "language": "...” | a2 | O | Only with PPRO: 2-letter language code (e.g.. de) that should be preferred when presenting payment pages to the consumer | Nur bei PPRO: 2-stelliger Sprachcode (z.B. de), der für die Zahlungsseiten für den Kunden bevorzugt werden soll |

| Key | REST | Format | CND | Description | Beschreibung |
|-------|---------------------------|---------|-----|---|---|
| Plain | "metadat a[plain]": "...” | ans..50 | O | A single value to be set by the merchant to return some information unencrypted in response /notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation. | Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID. Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt. |

| Key | REST | Format | CND | Description | Beschreibung |
|--------|--------------------|-----------|-----|--|--|
| Custom | "metadat a": "...” | ans..1024 | O | "Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom | Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt. Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird " " durch "&" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück. Hier finden Sie ein Beispiel: Custom |

Parameters for online transfers with eps

In case of using REST API

In case of using REST API you will always receive a link where the merchant has to redirect the consumer to complete the payment.

| REST | Format | CND | Description |
|-------------------------------|----------|-----|--|
| "paymentId": "...” | an32 | M | May be "00000000000000000000000000000000" if not yet set by Computop Paygate |
| "_Links.self.type": "...” | an..20 | M | "application/json" |
| "_Links.redirect.href": "...” | an..1024 | M | Merchant needs to redirect consumer to this URL to complete payment |
| "_Links.redirect.type": "...” | an..20 | M | "text/html" |

Merchant can use inquire.aspx

In case of using Key-Value-Pair API

The following table gives the result parameters which Computop Paygate transmits to **URLSuccess** or **URLFailure** and **URLNotify**. If you have specified the **Response=encrypt** parameter, the following parameters are sent **Blowfish encrypted** to your system:

i pls. be prepared to receive additional parameters at any time and do not check the order of parameters

i the key (e.g. MerchantId, RefNr) should not be checked case-sentive

| Key | Format | CND | Description |
|-----|---------|-----|----------------------------------|
| mid | ans..30 | M | MerchantID, assigned by Computop |

| | | | |
|----------------------|-----------|----|--|
| PayID | an32 | M | ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request. |
| XID | an32 | M | ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate |
| TransID | ans..64 | M | TransactionID provided by you which should be unique for each payment |
| Status | a..50 | M | OK, AUTHORIZED (URLSuccess) or FAILED (URLFailure). with PPRO also AUTHORIZE_REQUEST |
| Description | ans..1024 | M | Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis! |
| Code | n8 | M | Error code according to Paygate Response Codes (A4 Error codes) |
| RefNr | ns..30 | O | Unique reference number. In case of PPRO: Only characters a-zA-Z0-9,-_ are allowed, format ans..40. |
| MAC | an64 | M | Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none">• HMAC Authentication (Request)• HMAC Authentication (Notify) |
| UserData | ans..1024 | O | If specified at request, Paygate forwards the parameter with the payment result to the shop. |
| AccOwner | ans3..50 | M | Name of account holder |
| IBAN | ans..34 | OC | Obligatory for PPRO: International Bank Account Number for SEPA |
| BIC | ans..11 | OC | Obligatory for PPRO: Bank Identifier Code for SEPA |
| PaymentP urpose | ans..26 | C | Only with PPRO: Purpose of payment |
| Payment Guarantee | a..12 | C | Only with PPRO: NONE= no payment guarantee, VALIDATED= customer account valid, but no payment guarantee, FULL= payment guarantee Notice: This parameter is only returned if the Status=OK. |
| ErrorText | ans..128 | C | Only with PPRO: Detailed PPRO error message. Notice: Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk . |
| Transacti onID | an..20 | O | Only with PPRO: Unique transaction number from PPRO |
| Plain | ans..50 | O | A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation. |
| Custom | ans..1024 | O | "Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer. The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose. Please find a samples here: Custom |

| Key | Format | CND | Description | Beschreibung |
|--------------|---------------|------------|---|---|
| PayID | an32 | M | ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request. | Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request. |

| Key | Format | CND | Description | Beschreibung |
|------------|---------------|------------|--|--|
| XID | an32 | M | ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate | Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden |

| Key | Format | CND | Description | Beschreibung |
|----------------|---------------|------------|---|--|
| TransID | ans..64 | M | TransactionID provided by you which should be unique for each payment | Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss |

| Key | Format | CND | Description | Beschreibung |
|------------|---------------|------------|--------------------|---------------------|
| | | | | |

| | | | | |
|--------|-------|---|---|--|
| Status | a..50 | M | OK, AUTHORIZED (URLSuccess) or FAILED (URLFailure). with PPRO also AUTHORIZE_REQUEST | OK, AUTHORIZED (URLSuccess) oder FAILED (URLFailure). bei PPRO auch AUTHORIZE_REQUEST |
|--------|-------|---|---|--|

| Key | Format | CND | Description | Beschreibung |
|-------------|-----------|-----|--|---|
| Description | ans..1024 | M | Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis! | Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter Description , sondern Code für die Auswertung des Transaktionsstatus! |

| Key | Format | CND | Description | Beschreibung |
|------|--------|-----|---|---|
| Code | an8 | M | Error code according to Paygate Response Codes (A4 Error codes) | Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes) |

| Key | Format | CND | Description | Beschreibung |
|-------|--------|-----|---|---|
| RefNr | ns..30 | O | Unique reference number. In case of PPRO: Only characters a-zA-Z0-9,_ are allowed, format ans..40. | Eindeutige Referenznummer. Bei PPRO: Nur die Zeichen a-zA-Z0-9,_ sind erlaubt, Format ans..40. |

| Key | Format | CND | Description | Beschreibung |
|-----|--------|-----|---|--|
| MAC | an64 | M | Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: • HMAC Authentication (Request) • HMAC Authentication (Notify) | Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: • HMAC-Authentisierung (Anfrage) • HMAC-Authentisierung (Notify) |

| Key | Format | CND | Description | Beschreibung |
|-----------|-----------|-----|--|--|
| UserD ata | ans..1024 | O | If specified at request, Paygate forwards the parameter with the payment result to the shop. | Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop. |

| Key | Format | CND | Description | Beschreibung |
|-------------------|----------|-----|--|--|
| AccOwner | ans3..50 | M | Name of account holder | Name des Kontoinhabers |
| IBAN | ans..34 | OC | Obligatory for PPRO: International Bank Account Number for SEPA | bei PPRO Pflicht: International Bank Account Number für SEPA |
| BIC | ans..11 | OC | Obligatory for PPRO: Bank Identifier Code for SEPA | bei PPRO Pflicht: Bank Identifier Code für SEPA |
| PaymentP urpose | ans..26 | C | Only with PPRO: Purpose of payment | Nur bei PPRO: Zahlungszweck |
| PaymentG uarantee | a..12 | C | Only with PPRO: NONE= no payment guarantee, VALIDATED= customer account valid, but no payment guarantee, FULL= payment guarantee Notice: This parameter is only returned if the Status=OK. | Nur bei PPRO: NONE= keine Zahlungsgarantie, VALIDATED= Kundenkonto valide, aber keine Zahlungsgarantie, FULL= Zahlungsgarantie Hinweis: Dieser Parameter wird nur zurückgegeben, falls der Status=OK ist. |
| ErrorText | ans..128 | C | Only with PPRO: Detailed PPRO error message. Notice: Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk . | Nur bei PPRO: detaillierte PPRO Fehlermeldung. Hinweis: Wird nur bei Status=FAILED zurückgegeben. Nutzung nur in Abstimmung mit dem Computop Helpdesk möglich. |
| Transactio nID | an..20 | O | Only with PPRO: Unique transaction number from PPRO | Nur bei PPRO: Eindeutige Transaktionsnummer bei PPRO |

| Key | Format | CND | Description | Beschreibung |
|-------|---------|-----|--|---|
| Plain | ans..50 | O | A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation. | Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID. Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt. |

| Key | Format | CND | Description | Beschreibung |
|-----|--------|-----|-------------|--------------|
|-----|--------|-----|-------------|--------------|

| | | | | |
|--------|-----------|---|---|---|
| Custom | ans..1024 | O | <p>"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.</p> <p>The Custom-value is added to the Computop Paygate response in plain text and the ";" is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.</p> <p>Please find a samples here: Custom</p> | <p>Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt.</p> <p>Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird ";" durch "&" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück.</p> <p>Hier finden Sie ein Beispiel: Custom</p> |
|--------|-----------|---|---|---|

Result parameters for URLNotify, URLsuccess and URLFailure in case of eps

Credit with reference

Credits (refunds) are possible via a Server-to-Server connection. Eps credits are only allowed with the PPRO connection. Paygate permits only credits for eps that reference on a capture previously made via Paygate. The amount of the Credit is limited to the amount of the previous capture.

To carry out a credit with a reference transaction, please use the following URL:

<https://www.computop-paygate.com/credit.aspx>

Notice: For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

| Key | REST | Format | CND | Description |
|------------|--------------------------------|---------|-----|---|
| MerchantID | BasicAuth. Username | ans..30 | M | MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too. |
| PayID | "paymentId": "..." | an32 | M | ID assigned by Paygate for the payment to be credited |
| TransID | "transactionId": "..." | ans..64 | M | TransactionID provided by you which should be unique for each payment |
| MAC | --- | an64 | M | Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> HMAC Authentication (Request) HMAC Authentication (Notify) |
| Amount | "amount": { "value": ...} | n..10 | M | Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit). |
| Currency | "amount": { "currency": "..."} | a3 | M | Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table |
| ReqID | "requestId":..." | ans..32 | O | <p>To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.</p> <p>Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.</p> <p>Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.</p> |

| Key | REST | Format | CND | Description | Beschreibung |
|-------|------------------|--------|-----|---|---|
| PayID | "paymentId":..." | an32 | M | ID assigned by Paygate for the payment to be credited | Vom Paygate vergebene ID für die gutzuschreibende Zahlung |

| Key | REST | Format | CND | Description | Beschreibung |
|---------|------------------------|---------|-----|---|--|
| TransID | "transactionId": "..." | ans..64 | M | TransactionID provided by you which should be unique for each payment | Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss |

| Key | REST | Format | CND | Description | Beschreibung |
|-----|------|--------|-----|--|---|
| MAC | --- | an64 | M | Hash Message Authentication Code (HMAC) with SHA-256-algorithm. Details can be found here: <ul style="list-style-type: none">• HMAC Authentication (Request)• HMAC Authentication (Notify) | Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: <ul style="list-style-type: none">• HMAC-Authentisierung (Anfrage)• HMAC-Authentisierung (Notify) |

| Key | REST | Format | CND | Description | Beschreibung |
|--------|--------------------------|--------|-----|--|---|
| Amount | "amount": {"value": ...} | n..10 | M | Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit). | Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den Computop Helpdesk , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten. |

| Key | REST | Format | CND | Description | Beschreibung |
|----------|-----------------------------|--------|-----|--|---|
| Currency | "amount": {"currency": ...} | a3 | M | Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table | Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: A1 Währungstabelle |

| Key | REST | Format | CND | Description | Beschreibung |
|-------|-------------------|---------|-----|--|---|
| ReqID | "requestId": ..." | ans..32 | O | To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. Notice: Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate. | Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück. Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet. Hinweis: Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht. |

Parameters for credits of eps payments

The following table describes the result parameters with which the Computop Paygate responds to your system

i pls. be prepared to receive additional parameters at any time and do not check the order of parameters

i the key (e.g. MerchantId, RefNr) should not be checked case-sentive

| Key | REST | Format | CND | Description |
|---------|-----------------------|---------|-----|---|
| mid | "merchantId": ..." | ans..30 | M | MerchantID, assigned by Computop |
| PayID | "paymentId": ..." | an32 | M | ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request. |
| XID | "xId": ..." | an32 | M | ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate |
| TransID | "transactionId": ..." | ans..64 | M | TransactionID provided by you which should be unique for each payment |

| | | | | |
|-------------|--|-----------|---|---|
| Status | "status": "OK" "status": "AUTHORIZED" "status": "FAILED" | a..50 | M | OK or AUTHORIZED (URLSuccess) as well as FAILED (URLFailure) |
| Description | "description": "..." | ans..1024 | M | Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis! |
| Code | "code": ... | an8 | M | Error code according to Paygate Response Codes (A4 Error codes) |
| ErrorText | "errorText": "..." | ans..128 | C | Detailed PPRO error message. Notice: Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk . |

| Key | REST | Format | CND | Description | Beschreibung |
|-------|------------------------|--------|-----|---|---|
| PayID | "paymen tId": "..." | an32 | M | ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request. | Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request. |

| Key | REST | Format | CND | Description | Beschreibung |
|-----|-----------------|--------|-----|--|--|
| XID | "xId": "..." | an32 | M | ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate | Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden |

| Key | REST | Format | CND | Description | Beschreibung |
|---------|---------------------------|---------|-----|---|--|
| TransID | "transactionId": "..." | ans..64 | M | TransactionID provided by you which should be unique for each payment | Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss |

| Key | REST | Format | CND | Description | Beschreibung |
|--------|--|--------|-----|--|---|
| Status | "status": "OK" "status": "AUTHORIZED" "status": "FAILED" | a..50 | M | OK or AUTHORIZED (URLSuccess) as well as FAILED (URLFailure) | OK oder AUTHORIZED (URLSuccess) sowie FAILED (URLFailure) |

| Key | REST | Format | CND | Description | Beschreibung |
|-------------|--------------------------|-----------|-----|---|--|
| Description | "descript ion": "..." | ans..1024 | M | Further details in the event that payment is rejected. Please do not use the Description but the Code parameter for the transaction status analysis! | Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter Description , sondern Code für die Auswertung des Transaktionsstatus! |

| Key | REST | Format | CND | Description | Beschreibung |
|------|-------------|--------|-----|---|---|
| Code | "code": ... | an8 | M | Error code according to Paygate Response Codes (A4 Error codes) | Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes) |

| Key | REST | Format | CND | Description | Beschreibung |
|-----------|------------------------|----------|-----|---|---|
| ErrorText | "errorTe xt": "..." | ans..128 | C | Detailed PPRO error message. Notice: Is returned only if Status=FAILED. Use is possible only in agreement with Computop Helpdesk . | Detaillierte PPRO Fehlermeldung. Hinweis: Wird nur bei Status=FAILED zurückgegeben. Nutzung nur in Abstimmung mit dem Computop Helpdesk möglich. |

Result parameters for credits of eps payments

Batch processing via the interface

Basic information about using Batch files and about their structure can be found in the Batch Manager manual. Within batch processing not all functions are available which are usually available for the online interface.

This section describes the parameters which must be transferred with the data set (**Record**) for executing an eps credit and which information can be found within the response file about the payment status.

Notice: Please note that Batch processing for eps is possible only via PPRO connection.

Following table gives an overview of all batch versions that are possible for a specific action and their specialities:

| Action | Version | Description |
|--------|-----------|--|
| Credit | 1.0 / 2.0 | Standard version without return of parameter Code |
| | 1.x / 2.x | with RefNr (valid for all versions other than 1.0) |

Description of the possible batch versions

The structure for an eps credit within a Batch file to be submitted is the following:

```
HEAD,<MerchantID>,<Date>,<Version>
EPS,Credit,<PayID>,<TransID>,(<RefNr>),<Amount>,<Currency>
FOOT,<CountRecords>,<SumAmount>
```

Example for Master MID function:

```
HEAD,[Master]MerchantID,Date,2.x
Type,Action,[Slave]MID,Amount,Currency,TransID,Data (depends on Action)
FOOT,CountRecords,SumAmount
```

The following table describes the individual fields and values used within the data set (record) in the batch file:

| Key | Format | CND | Description |
|----------|---------|-----|--|
| Type | a..11 | M | HEAD for Header, FOOT for Footer, EPS for direct eps |
| Action | a..20 | M | The parameter Action defines the type of transaction: Credit |
| Amount | n..10 | M | Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit). |
| Currency | a3 | M | Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table |
| TransID | ans..64 | M | TransactionID provided by you which should be unique for each payment |
| RefNr | ns..30 | O | Unique reference number. In case of PPRO: Only characters a-zA-Z0-9,_ are allowed, format ans..40. |
| PayID | an32 | M | ID assigned by Paygate for this transaction |

| Key | Format | CND | Description | Beschreibung |
|--------|--------|-----|--|---|
| Amount | n..10 | M | Amount in the smallest currency unit (e.g. EUR Cent). Please contact the Computop Helpdesk , if you want to capture amounts <100 (smallest currency unit). | Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den Computop Helpdesk , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten. |

| Key | Format | CND | Description | Beschreibung |
|----------|--------|-----|--|---|
| Currency | a3 | M | Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: A1 Currency table | Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: A1 Währungstabelle |

| Key | Format | CND | Description | Beschreibung |
|---------|---------|-----|---|--|
| TransID | ans..64 | M | TransactionID provided by you which should be unique for each payment | Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss |

| Key | Format | CND | Description | Beschreibung |
|------------|---------------|------------|--|--|
| RefNr | ns..30 | O | Unique reference number. In case of PPRO: Only characters a-zA-Z0-9,-_ are allowed, format ans..40. | Eindeutige Referenznummer. Bei PPRO: Nur die Zeichen a-zA-Z0-9,-_ sind erlaubt, Format ans..40. |

| Key | Format | CND | Description | Beschreibung |
|------------|---------------|------------|---|--|
| PayID | an32 | M | ID assigned by Paygate for this transaction | Vom Paygate vergebene ID für diese Transaktion |

Description of fields within the record for Batch files

The record area within the response file for Batch transactions looks the following way:

```
HEAD,<MerchantID>,<Date>,<Version>
EPS,Credit,<PayID>,<TransID>,(<RefNr>),<Amount>,<Currency>,<Status>,<Code>
FOOT,<CountRecords>,<SumAmount>
```

The following table describes the response parameters which the Batch Manager saves in the Record area for each transaction (standard parameters not explained here, such as <TransID> or <RefNR> and request parameters are returned unchanged and correspond to the call as specified before):

| Key | Format | CND | Description |
|------------|---------------|------------|---|
| Action | a..20 | M | The parameter Action defines the type of transaction: Credit |
| PayID | an32 | M | ID assigned by Paygate for this transaction |
| Status | a..50 | M | OK (URLSuccess) or FAILED (URLFailure) |
| Code | an8 | M | Error code according to Paygate Response Codes (A4 Error codes) |

| Key | Format | CND | Description | Beschreibung |
|------------|---------------|------------|---|--|
| PayID | an32 | M | ID assigned by Paygate for this transaction | Vom Paygate vergebene ID für diese Transaktion |

| Key | Format | CND | Description | Beschreibung |
|------------|---------------|------------|--|--|
| Status | a..50 | M | OK (URLSuccess) or FAILED (URLFailure) | OK (URLSuccess) oder FAILED (URLFailure) |

| Key | Format | CND | Description | Beschreibung |
|------------|---------------|------------|---|---|
| Code | an8 | M | Error code according to Paygate Response Codes (A4 Error codes) | Fehlercode gemäß Paygate Antwort-Codes (A4 Fehlercodes) |

Description of result parameters within the record for Batch files