

# Przelewy24


- About Przelewy24
  - General information about Przelewy24
  - Process flow chart
- Paygate interface
  - Definitions
    - Data formats
    - Abbreviations
  - Payment with Przelewy24 via Paygate form interface
  - Przelewy24 via Direct Integration method (P24 Direct)
  - Credit with reference
- Batch processing via the interface

## About Przelewy24

### General information about Przelewy24

<b>Logo</b>	
<b>Info</b>	Przelewy24 is an online banking method for Poland. It uses online bank authentication for account postings in real-time. Przelewy24 is supported by 18 large banks and reaches 95 % of the polish customers in online banking. The system has no transaction limit and directs customers via its online banking environment directly to the payment processing.
<b>Type</b>	Payments by Online Bank Transfer

### Process flow chart

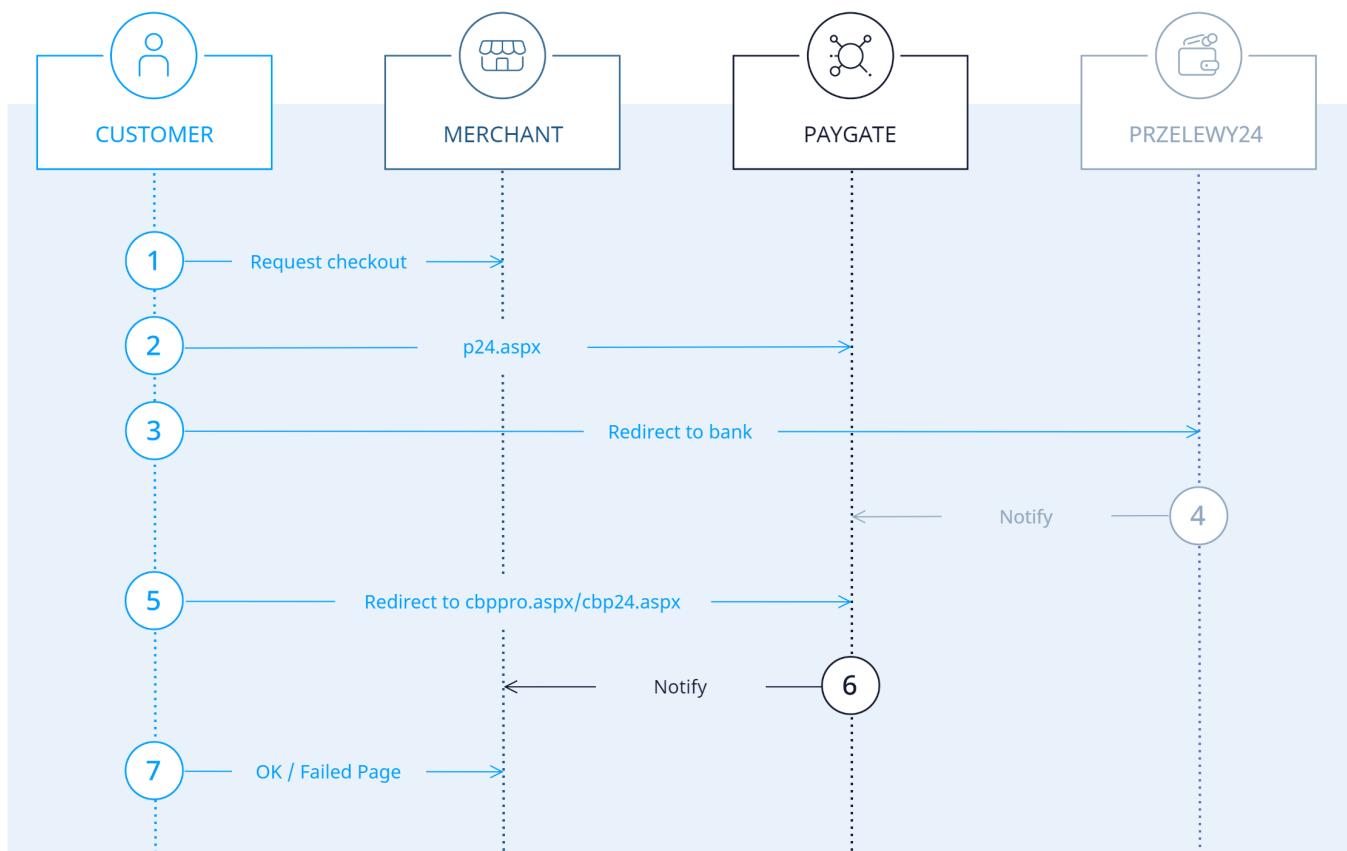

Przelewy24 process flow

## Paygate interface

### Definitions

#### Data formats

Format	Description
a	alphabetical
as	alphabetical with special characters
n	numeric
an	alphanumeric
ans	alphanumeric with special characters
ns	numeric with special characters
bool	boolean expression (true or false)
3	fixed length with 3 digits/characters
..3	variable length with maximum 3 digits/characters
enum	enumeration of allowed values
dttm	ISODateTime (YYYY-MM-DDThh:mm:ss)

## Abbreviations

Abbreviation	Description	Comment
CND	condition	
M	mandatory	If a parameter is mandatory, then it must be present
O	optional	If a parameter is optional, then it can be present, but it is not required
C	conditional	If a parameter is conditional, then there is a conditional rule which specifies whether it is mandatory or optional

**Notice:** Please note that the names of parameters can be returned in upper or lower case.

## Payment with Przelewy24 via Paygate form interface

To make a payment with Przelewy24 online transfer in Poland, please use the following URL:

<https://www.computop-paygate.com/p24.aspx>

**Notice:** For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
Merch antID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ans..40	O	Merchant's unique reference number. Only characters a-zA-Z0-9,-_ are allowed.
Amou nt	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
Curren cy	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Only PLN and EUR is permissible. Please find an overview here: <a href="#">A1 Currency table EN</a>
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>
Order Desc	ans..768	M	Description of goods and prices. Intended purpose on the statement of account.
URLS uccess	ans..256	M	Complete URL which calls up Paygate if payment has been successful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter <a href="#">UserData</a> . <b>i Common notes:</b> <ul style="list-style-type: none"> <li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>
URLF ailure	ans..256	M	Complete URL which calls up Paygate if payment has been unsuccessful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter <a href="#">UserData</a> . <b>i Common notes:</b> <ul style="list-style-type: none"> <li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>
Respo nse	a7	O	Status response sent by Paygate to <a href="#">URLSuccess</a> and <a href="#">URLFailure</a> , should be encrypted. For this purpose, transmit <a href="#">Response=encry</a> pt parameter.

URLNotify	ans..256	M	Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the <a href="#">UserData</a> parameter instead.  <b>i Common notes:</b> <ul style="list-style-type: none"><li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li><li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li></ul>
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
ReqId	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.  Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.  <b>Notice:</b> Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.
Selling Point	ans..50	O	Selling point
Service	ans..50	O	products or service sold
Channel	ans..64	O	Configuration channel of the PPRO contract (account and ContractID are stored in the system). If it exists, it may overwrite channels stored in the system.
Language	a2	O	2-letter language code (e.g. de) that should be preferred when presenting payment pages to the consumer
AccOwner	ans3..50	M	Name of account holder
Email	ans..100	M	E-Mail address of account holder
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID.  "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.  The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.  Please find a samples here: <a href="#">Custom</a>

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ans..40	O	Merchant's unique reference number. Only characters a-zA-Z0-9,-_ are allowed.	Eindeutige Referenznummer des Händlers. Nur die Zeichen a-zA-Z0-9,-_ sind erlaubt.

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Only PLN and EUR is permissible. Please find an overview here: <a href="#">A1 Currency table EN</a>	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Nur PLN und EUR zulässig. Hier eine Übersicht: <a href="#">A1 Währungstabelle</a>

Key	Format	CND	Description	Beschreibung

MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: <ul style="list-style-type: none"> <li>• <a href="#">HMAC-Authentisierung (Anfrage)</a></li> <li>• <a href="#">HMAC-Authentisierung (Notify)</a></li> </ul>
-----	------	---	---	--

Key	Format	CND	Description	Beschreibung
OrderDesc	ans..768	M	Description of goods and prices. Intended purpose on the statement of account.	Beschreibung der Waren und Preise. Verwendungszweck auf dem Kontoauszug.

Key	Format	CND	Description	Beschreibung
URLSuccess	ans..256	M	Complete URL which calls up Paygate if payment has been successful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Pay gate and shop, please use the parameter <a href="#">UserData</a> .  <b>i Common notes:</b> <ul style="list-style-type: none"> <li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>	Vollständige URL, die das Paygate aufruft, wenn die Zahlung erfolgreich war. Die URL darf nur über Port 443 aufgerufen werden. Diese URL darf keine Parameter enthalten: Um Parameter durchzurüicken nutzen Sie stattdessen den Parameter <a href="#">UserData</a> .  <b>i Allgemeine Hinweise:</b> <ul style="list-style-type: none"> <li>• Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten</li> <li>• Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.</li> </ul>

Key	Format	CND	Description	Beschreibung
URLFailure	ans..256	M	Complete URL which calls up Paygate if payment has been unsuccessful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Pay gate and shop, please use the parameter <a href="#">UserData</a> .  <b>i Common notes:</b> <ul style="list-style-type: none"> <li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>	Vollständige URL, die das Paygateaufruft, wenn die Zahlung gescheitert ist. Die URL darf nur über Port 443 aufgerufen werden. Diese URL darf keine Parameter enthalten: Um Parameter durchzurüicken nutzen Sie stattdessen den Parameter <a href="#">UserData</a> .  <b>i Allgemeine Hinweise:</b> <ul style="list-style-type: none"> <li>• Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten</li> <li>• Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.</li> </ul>

Key	Format	CND	Description	Beschreibung
Response	a7	O	Status response sent by Paygate to <a href="#">URLSuccess</a> and <a href="#">URLFailure</a> , should be encrypted. For this purpose, transmit <a href="#">Response=encrypt</a> parameter.	Die Status-Rückmeldung, die das Paygate an <a href="#">URLSuccess</a> und <a href="#">URLFailure</a> sendet, sollte verschlüsselt werden. Dazu übergeben Sie den Parameter <a href="#">Response=encrypt</a> .

Key	Format	CND	Description	Beschreibung
URLNotify	ans..256	M	Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the <a href="#">UserData</a> parameter instead.  <b>i Common notes:</b> <ul style="list-style-type: none"> <li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>	Vollständige URL, die das Paygate aufruft, um den Shop zu benachrichtigen. Die URL darf nur über Port 443 aufgerufen werden. Sie darf keine Parameter enthalten: Nutzen Sie stattdessen den Parameter <a href="#">UserData</a> .  <b>i Allgemeine Hinweise:</b> <ul style="list-style-type: none"> <li>• Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten</li> <li>• Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.</li> </ul>

Key	Format	CND	Description	Beschreibung
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung

<b>ReqId</b>	ans..32	O	<p>To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.</p> <p>Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.</p> <p><b>Notice:</b> Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.</p>	<p>Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück.</p> <p>Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet.</p> <p><b>Hinweis:</b> Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.</p>
--------------	---------	---	---	--

Key	Format	CND	Description	Beschreibung
SellingPoint	ans..50	O	Selling point	Verkaufsstelle

Key	Format	CND	Description	Beschreibung
Service	ans..50	O	products or service sold	verkaufte Produkte oder Dienstleistung

Key	Format	CND	Description	Beschreibung
Chann el	ans..64	O	Configuration channel of the PPRO contract (account and ContractID are stored in the system). If it exists, it may overwrite channels stored in the system.	Konfigurationskanal des PPRO-Vertrags (Account und ContractID sind im System hinterlegt). Wenn vorhanden, überschreibt er den eventuell im System hinterlegten Channel.

Key	Format	CND	Description	Beschreibung
Language	a2	O	2-letter language code (e.g. de) that should be preferred when presenting payment pages to the consumer	2-stelliger Sprachcode (z. B. de), der bei der Darstellung von Zahlungsseiten für den Kunden bevorzugt werden sollte
AccO wner	ans3..50	M	Name of account holder	Name des Kontoinhabers
Email	ans..100	M	E-Mail address of account holder	E-Mail-Adresse des Kontoinhabers

Key	Format	CND	Description	Beschreibung
Plain	ans..50	O	<p>A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID.</p> <p>"Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.</p>	<p>Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID.</p> <p>Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt.</p>

Key	Format	CND	Description	Beschreibung
Custom	ans..1024	O	<p>"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.</p> <p>The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&amp;". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.</p> <p>Please find a samples here: <a href="#">Custom</a></p>	<p>Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt.</p> <p>Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird " " durch "&amp;" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück.</p> <p>Hier finden Sie ein Beispiel: <a href="#">Custom</a></p>

Parameters for payments with Przelew24 (via PPRO)

## Przelew24 via Direct Integration method (P24 Direct)

To make a payment with Przelew24 online transfer via direct integration in Poland, please use the following URL:

<https://www.computop-paygate.com/p24.aspx>

Key	Format	CND	Description
Merch antID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Amou nt	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
RefNr	ans..20	O	Merchant's unique reference number
Curren cy	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Default value: "PLN"
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>
Order Desc	ans..768	M	Description of goods and prices. Intended purpose on the statement of account.
URLS uccess	ans..256	M	Complete URL which calls up Paygate if payment has been successful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter <a href="#">UserData</a> . <b>i Common notes:</b> <ul style="list-style-type: none"> <li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>
URLF ailure	ans..256	M	Complete URL which calls up Paygate if payment has been unsuccessful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter <a href="#">UserData</a> . <b>i Common notes:</b> <ul style="list-style-type: none"> <li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>
Respo nse	a7	O	Status response sent by Paygate to <a href="#">URLSuccess</a> and <a href="#">URLFailure</a> , should be encrypted. For this purpose, transmit <a href="#">Response=encry</a> pt parameter.
URLN otify	ans..256	M	Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the <a href="#">UserData</a> parameter instead. <b>i Common notes:</b> <ul style="list-style-type: none"> <li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.
ReqId	ans..32	O	To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action. Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly. <b>Notice:</b> Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.
Lang uage	a2	O	2-letter language code (e.g. de) that should be preferred when presenting payment pages to the consumer. Default value: "pl".
bdFirst Name	ans3..20	O	Customer's first name
bdLast Name	an..20	O	Customer's surname
bdStre et	ans..80	O	Customer's address
bdZip	n..10	O	Customer's postal code
bdCity	ans..50	O	Customer's city

bdCountryCode	a2	M	Country code of the customer, 2 characters according to ISO 3166. Default value: "PL"
bdPhone	ans..12	O	Customer's telephone in the following format: 481321132123
bdeMail	ans..50	M	E-Mail address of account holder
PayType	a..10	O	<p>Payment method. List of payment methods available through direct API.</p> <p>Available values:</p> <ul style="list-style-type: none"> <li>• blik</li> </ul>
AuthCode	n..10	OC	<p><b>Required in case of BLIK one time payment.</b></p> <p>6-digit, one-time BLIK code generated in the app.            *If provided then <b>PayType = blik</b> otherwise request will be rejected.</p>
TermsAndConditions	an..10	OC	<p><b>Required in case "PayType" parameter is provided with the request</b></p> <p>Default: false</p> <p>Acceptance of Przelewy24 regulations:</p> <ul style="list-style-type: none"> <li>• false – display consent on p24 website (default),</li> <li>• true – consent granted, do not display.</li> </ul> <p>In case the „true” parameter is sent, the consent – worded as follows – must be displayed on the Partner’s website: „I hereby state that I have read the <a href="#">regulations</a> and <a href="#">information obligation</a> of "Przelewy24".            Under words <i>regulations</i> and <i>information obligation</i> there must be hyperlinks redirecting to websites with these documents.            The checkbox must not be ticked by default.</p>
ChargeAmount	ans..10	O	Delivery cost
ShippingMethod	n..1	O	<p>Type of shipment:</p> <p>Possible values:            0 – courier            1 – delivery point            2 – parcel locker            3 – package in a shop</p>
sdStreet	ans..80	O	Shipment address: street and number
sdZip	n..10	O	Shipment zip code
sdCity	ans..50	O	Shipment city
sdCountryCode	a2	O	Country code of the shipment address, 2 characters according to ISO 3166
ArticleList	String	O	Article list, base64 encoded value
items	array	M	Array of items, e.g.: {"items": [{"item1..."}, {"item2..."}]}
items.id	ans..30	M	Product number
items.description	ans..30	M	Product description
items.quantity	ans..30	M	Product quantity
items.amount	n..10	M	Product price
items.name	n..10	M	Product name
Plain	ans..50	O	<p>A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID.</p> <p>"Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.</p>

Custom	ans..1024	O	<p>"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.</p> <p>The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&amp;". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.</p> <p>Please find a samples here: <a href="#">Custom</a></p>
--------	-----------	---	---

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
RefNr	ans..20	O	Merchant's unique reference number	Eindeutige Referenznummer des Händlers
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Default value: "PLN"	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Standardwert: "PLN"

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here:  • <a href="#">HMAC Authentication (Request)</a> • <a href="#">HMAC Authentication (Notify)</a>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier:  • <a href="#">HMAC-Authentisierung (Anfrage)</a> • <a href="#">HMAC-Authentisierung (Notify)</a>

Key	Format	CND	Description	Beschreibung
OrderDesc	ans..768	M	Description of goods and prices. Intended purpose on the statement of account.	Beschreibung der Waren und Preise. Verwendungszweck auf dem Kontoauszug.

Key	Format	CND	Description	Beschreibung
URLSuccess	ans..256	M	Complete URL which calls up Paygate if payment has been successful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter <a href="#">UserData</a> .  <b>i Common notes:</b> <ul style="list-style-type: none"><li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li><li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li></ul>	Vollständige URL, die das Paygate aufruft, wenn die Zahlung erfolgreich war. Die URL darf nur über Port 443 aufgerufen werden. Diese URL darf keine Parameter enthalten: Um Parameter durchzureichen nutzen Sie stattdessen den Parameter <a href="#">UserData</a> .  <b>i Allgemeine Hinweise:</b> <ul style="list-style-type: none"><li>• Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten</li><li>• Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.</li></ul>

Key	Format	CND	Description	Beschreibung
URLFailure	ans..256	M	Complete URL which calls up Paygate if payment has been unsuccessful. The URL may be called up only via port 443. This URL may not contain parameters: In order to exchange values between Paygate and shop, please use the parameter <a href="#">UserData</a> .  <b>i Common notes:</b> <ul style="list-style-type: none"><li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li><li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLsuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li></ul>	Vollständige URL, die das Paygateaufruft, wenn die Zahlung gescheitert ist. Die URL darf nur über Port 443 aufgerufen werden. Diese URL darf keine Parameter enthalten: Um Parameter durchzureichen nutzen Sie stattdessen den Parameter <a href="#">UserData</a> .  <b>i Allgemeine Hinweise:</b> <ul style="list-style-type: none"><li>• Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten</li><li>• Betrüger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLsuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.</li></ul>

Key	Format	CND	Description	Beschreibung
-----	--------	-----	-------------	--------------

<b>Response</b>	a7	O	Status response sent by Paygate to <b>URLSuccess</b> and <b>URLFailure</b> , should be encrypted. For this purpose, transmit <b>Response=encrypt</b> parameter.	Die Status-Rückmeldung, die das Paygate an <b>URLSuccess</b> und <b>URLFailure</b> sendet, sollte verschlüsselt werden. Dazu übergeben Sie den Parameter <b>Response=encrypt</b> .
-----------------	----	---	---	--

Key	Format	CND	Description	Beschreibung
URLNotify	ans..256	M	<p>Complete URL which Paygate calls up in order to notify the shop about the payment result. The URL may be called up only via port 443. It may not contain parameters: Use the <b>UserData</b> parameter instead.</p> <p><b>i Common notes:</b></p> <ul style="list-style-type: none"> <li>• We recommend to use parameter "response=encrypt" to get an encrypted response by Paygate</li> <li>• However, fraudster may just copy the encrypted DATA-element which are sent to URLFailure and send the DATA to URLSuccess/URLNotify. Therefore ensure to check the "code"-value which indicates success/failure of the action. Only a result of "code=00000000" should be considered successful.</li> </ul>	<p>Vollständige URL, die das Paygate aufruft, um den Shop zu benachrichtigen. Die URL darf nur über Port 443 aufgerufen werden. Sie darf keine Parameter enthalten: Nutzen Sie stattdessen den Parameter <b>UserData</b>.</p> <p><b>i Allgemeine Hinweise:</b></p> <ul style="list-style-type: none"> <li>• Wir empfehlen, den Parameter "response=encrypt" zu verwenden, um eine verschlüsselte Antwort von Paygate zu erhalten</li> <li>• Betruger könnten das verschlüsselte DATA-Element kopieren, welches an URLFailure gesendet wurde, und betrügerisch dasselbe DATA an URLSuccess/URLNotify senden. Überprüfen Sie daher unbedingt den "code"-Wert des DATA-Elements. Nur eine Antwort mit "code=00000000" sollte als erfolgreich angesehen werden.</li> </ul>

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
ReqId	ans..32	O	<p>To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.</p> <p>Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.</p> <p><b>Notice:</b> Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.</p>	<p>Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück.</p> <p>Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet.</p> <p><b>Hinweis:</b> Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.</p>

Key	Format	CND	Description	Beschreibung
Language	a2	O	2-letter language code (e.g. de) that should be preferred when presenting payment pages to the consumer. Default value: "pl".	2-stelliger Sprachcode (z. B. de), der bei der Darstellung von Zahlungsseiten für den Kunden bevorzugt werden sollte. Standardwert: "pl".
bdFirstName	ans3..20	O	Customer's first name	Vorname des Kunden
bdLastName	an..20	O	Customer's surname	Nachname des Kunden
bdStreet	ans..80	O	Customer's address	Adresse des Kunden
bdZip	n..10	O	Customer's postal code	Postleitzahl des Kunden
bdCity	ans..50	O	Customer's city	Ort des Kunden
bdCountryCode	a2	M	Country code of the customer, 2 characters according to ISO 3166. Default value: "PL"	Ländercode des Kunden, 2 Zeichen gemäß ISO 3166. Standardwert: „PL“
bdPhone	ans..12	O	Customer's telephone in the following format: 481321132123	Telefonnummer des Kunden im folgenden Format: 481321132123
bdeMail	ans..50	M	E-Mail address of account holder	E-Mail-Adresse des Kontoinhabers
PayType	a..10	O	<p>Payment method. List of payment methods available through direct API.</p> <p>Available values:</p> <ul style="list-style-type: none"> <li>• blik</li> </ul>	<p>Zahlungsmethode. Liste der über die direkte API verfügbaren Zahlungsmethoden.</p> <p>Verfügbare Werte:</p> <ul style="list-style-type: none"> <li>• blik</li> </ul>
AuthCode	n..10	OC	<p><b>Required in case of BLIK one time payment.</b></p> <p>6-digit, one-time BLIK code generated in the app. *If provided then <b>PayType = blik</b> otherwise request will be rejected.</p>	<p><b>Erforderlich bei BLIK-Einmalzahlung.</b></p> <p>6-stelliger, einmaliger BLIK-Code, der in der App generiert wird. *Wenn angegeben, ist <b>PayType = blik</b>, andernfalls wird die Anfrage abgelehnt.</p>

TermsAndConditions	an..10	OC	<p><b>Required in case "PayType" parameter is provided with the request</b></p> <p>Default: false</p> <p>Acceptance of Przelewy24 regulations:</p> <ul style="list-style-type: none"> <li>• false – display consent on p24 website (default),</li> <li>• true – consent granted, do not display.</li> </ul> <p>In case the „true“ parameter is sent, the consent – worded as follows – must be displayed on the Partner's website: „I hereby state that I have read the <a href="#">regulations</a> and <a href="#">information obligation</a> of „Przelewy24“.</p> <p>Under words <i>regulations</i> and <i>information obligation</i> there must be hyperlinks redirecting to websites with these documents. The checkbox must not be ticked by default.</p>	<p><b>Erforderlich, wenn bei der Anfrage der Parameter "PayType" angegeben ist</b></p> <p>Standardwert: false</p> <p>Akzeptanz der Przelewy24-Bestimmungen:</p> <ul style="list-style-type: none"> <li>• false – Zustimmung auf der p24-Website anzeigen (Standard),</li> <li>• true – Zustimmung erteilt, nicht anzeigen.</li> </ul> <p>Falls der Parameter „true“ übergeben wird, muss die Zustimmung – mit folgendem Wortlaut – auf der Webseite des Partners angezeigt werden: „Hiermit erkläre ich, dass ich die <a href="#">Bestimmungen</a> und <a href="#">Informationspflichten</a> von „Przelewy24“ gelesen habe.“</p> <p>Bei den Wörtern <i>Bestimmungen</i> und <i>Informationspflichten</i> müssen Hyperlinks vorhanden sein, die zu den Webseiten mit diesen Dokumenten weiterleiten. Das Kontrollkästchen darf standardmäßig nicht aktiviert sein.</p>
ChargeAmount	ans..10	O	Delivery cost	Lieferkosten
ShippingMethod	n..1	O	Type of shipment:  Possible values: 0 – courier 1 – delivery point 2 – parcel locker 3 – package in a shop	Lieferart:  Mögliche Werte: 0 – Kourier 1 – Lieferpunkt 2 – Paketschließfach 3 – Paket in einem Geschäft
sdStreet	ans..80	O	Shipment address: street and number	Lieferadresse: Straße und Hausnummer
sdZip	n..10	O	Shipment zip code	Postleitzahl der Lieferadresse
sdCity	ans..50	O	Shipment city	Ort der Lieferadresse
sdCountryCode	a2	O	Country code of the shipment address, 2 characters according to ISO 3166	Ländercode der Lieferadresse, 2 Zeichen gemäß ISO 3166
ArticleList	String	O	Article list, base64 encoded value	Artikelliste, Base64-codierter Wert
items	array	M	Array of items, e.g.: {"items": [{"item1": ...}, {"item2": ...}]}  <a href="#">items.id</a>	Array von Artikeln, z. B.: {"items": [{"item1": ...}, {"item2": ...}]}  Produktnummer
items.description	ans..30	M	Product description	Produktbeschreibung
items.quantity	ans..30	M	Product quantity	Produktmenge
items.amount	n..10	M	Product price	Produktpreis
items.name	n..10	M	Product name	Produktname

Key	Format	CND	Description	Beschreibung
Plain	ans..50	O	<p>A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID.</p> <p>"Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.</p>	<p>Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID.</p> <p>Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt.</p>

Key	Format	CND	Description	Beschreibung
Custom	ans..1024	O	<p>"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.</p> <p>The Custom-value is added to the Computop Paygate response in plain text and the ";" is replaced by a "&amp;". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.</p> <p>Please find a samples here: <a href="#">Custom</a></p>	<p>Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt.</p> <p>Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird ";" durch "&amp;" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück.</p> <p>Hier finden Sie ein Beispiel: <a href="#">Custom</a></p>

Parameters for payments with Przelewy24 via Direct Integration

The following table gives the result parameters which Computop Paygate transmits to **URLSuccess** or **URLFailure** and **URLNotify**. If you have specified the **Response=encrypt** parameter, the following parameters are sent **Blowfish encrypted** to your system:

**i** pls. be prepared to receive additional parameters at any time and do not check the order of parameters

**i** the key (e.g. MerchantId, RefNr) should not be checked case-sentive

Key	Format	CND	Description								
mid	ans..30	M	MerchantID, assigned by Computop								
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.								
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate								
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment								
refnr	ans..40	O	Merchant's unique reference number. Only characters a-zA-Z0-9,_ are allowed.								
Status	a..50	M	OK or AUTHORIZE_REQUEST ( <a href="#">URLSuccess</a> ) as well as FAILED ( <a href="#">URLFailure</a> )								
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!								
Code	an8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )								
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>								
UserData	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.								
TID	ans..40	O	Transaction reference at Przelewy24								
payment Method	ans..40	O	The payment method that was chosen to complete the payment by the customer.								
PaymentP urpose	ans..26	O	Purpose of payment								
Payment Guarantee	a..12	C	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Value</th> <th style="text-align: center;">Description</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">NONE</td> <td>no payment guarantee</td> </tr> <tr> <td style="text-align: center;">VALIDATED</td> <td>customer account valid, but no payment guarantee</td> </tr> <tr> <td style="text-align: center;">FULL</td> <td>payment guarantee</td> </tr> </tbody> </table> <p>Notice: This parameter is only returned if the Status=OK.</p>	Value	Description	NONE	no payment guarantee	VALIDATED	customer account valid, but no payment guarantee	FULL	payment guarantee
Value	Description										
NONE	no payment guarantee										
VALIDATED	customer account valid, but no payment guarantee										
FULL	payment guarantee										
ErrorText	ans..128	C	<p>Detailed PPRO error message.</p> <p>Notice: Is returned only if Status=FAILED. Use is possible only in agreement with <a href="#">Computop Helpdesk</a>.</p>								
Transacti onID	an..20	O	Unique transaction number from PPRO or P24 direct method.								
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID. "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.								
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.  The Custom-value is added to the Computop Paygate response in plain text and the "!" is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.  Please find a samples here: <a href="#">Custom</a>								

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
refnr	ans..40	O	Merchant's unique reference number. Only characters a-zA-Z0-9,-_ are allowed.	Eindeutige Referenznummer des Händlers. Nur die Zeichen a-zA-Z0-9,-_ sind erlaubt.

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK or AUTHORIZE_REQUEST ( <a href="#">URLSuccess</a> ) as well as FAILED ( <a href="#">URLFailure</a> )	OK oder AUTHORIZE_REQUEST ( <a href="#">URLSuccess</a> ) sowie FAILED ( <a href="#">URLFailure</a> )

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please do not use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie nicht den Parameter <b>Description</b> , sondern <b>Code</b> für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	an8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"><li>• <a href="#">HMAC Authentication (Request)</a></li><li>• <a href="#">HMAC Authentication (Notify)</a></li></ul>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier: <ul style="list-style-type: none"><li>• <a href="#">HMAC-Authentisierung (Anfrage)</a></li><li>• <a href="#">HMAC-Authentisierung (Notify)</a></li></ul>

Key	Format	CND	Description	Beschreibung
UserD ata	ans..1024	O	If specified at request, Paygate forwards the parameter with the payment result to the shop.	Wenn beim Aufruf angegeben, übergibt das Paygate die Parameter mit dem Zahlungsergebnis an den Shop.

Key	Format	CND	Description	Beschreibung
TID	ans..40	O	Transaction reference at Przelewy24	Transaktionsreferenz bei Przelewy24
paymentMethod	ans..40	O	The payment method that was chosen to complete the payment by the customer.	TBD

Key	Format	CND	Description	Beschreibung
PaymentPurpose	ans..26	O	Purpose of payment	Zahlungszweck

Key	Format	CND	Description	Beschreibung																
PaymentGuarantee	a..12	C	<table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>NONE</td> <td>no payment guarantee</td> </tr> <tr> <td>VALIDATED</td> <td>customer account valid, but no payment guarantee</td> </tr> <tr> <td>FULL</td> <td>payment guarantee</td> </tr> </tbody> </table> <p>Notice: This parameter is only returned if the Status=OK.</p>	Value	Description	NONE	no payment guarantee	VALIDATED	customer account valid, but no payment guarantee	FULL	payment guarantee	<table border="1"> <thead> <tr> <th>Wert</th> <th>Beschreibung</th> </tr> </thead> <tbody> <tr> <td>NONE</td> <td>keine Zahlungsgarantie</td> </tr> <tr> <td>VALIDATED</td> <td>Kundenkonto valide, aber keine Zahlungsgarantie</td> </tr> <tr> <td>FULL</td> <td>Zahlungsgarantie</td> </tr> </tbody> </table> <p>Hinweis: Dieser Parameter wird nur zurückgegeben, falls der Status=OK ist.</p>	Wert	Beschreibung	NONE	keine Zahlungsgarantie	VALIDATED	Kundenkonto valide, aber keine Zahlungsgarantie	FULL	Zahlungsgarantie
Value	Description																			
NONE	no payment guarantee																			
VALIDATED	customer account valid, but no payment guarantee																			
FULL	payment guarantee																			
Wert	Beschreibung																			
NONE	keine Zahlungsgarantie																			
VALIDATED	Kundenkonto valide, aber keine Zahlungsgarantie																			
FULL	Zahlungsgarantie																			

Key	Format	CND	Description	Beschreibung

ErrorText	ans..128	C	Detailed PPRO error message.  Notice: Is returned only if Status=FAILED. Use is possible only in agreement with <a href="#">Computop Helpdesk</a> .	Detaillierte PPRO Fehlermeldung.  Hinweis: Wird nur bei Status=FAILED zurückgegeben. Nutzung nur in Abstimmung mit dem <a href="#">Computop Helpdesk</a> möglich.
-----------	----------	---	---	---

Key	Format	CND	Description	Beschreibung
TransactionID	an..20	O	Unique transaction number from PPRO or P24 direct method.	Eindeutige Transaktionsnummer bei PPRO

Key	Format	CND	Description	Beschreibung
Plain	ans..50	O	A single value to be set by the merchant to return some information unencrypted in response/notify, e.g. the MID.  "Plain"-parameter is part of encrypted "Data" in Computop Paygate and therefore protected against manipulation.	Ein einzelner Wert, der von Ihnen gesetzt werden kann, um Informationen wieder unverschlüsselt in der Antwort bzw. im Notify zurückzugeben, z.B. die MID.  Da der "Plain"-Parameter Teil des verschlüsselten "Data" im Computop Paygate ist, ist dieser vor Manipulationen geschützt.

Key	Format	CND	Description	Beschreibung
Custom	ans..1024	O	"Custom"-parameter is added to the request data before encryption and is part of encrypted "Data" in Computop Paygate request. By this they are protected against manipulation by a consumer.  The Custom-value is added to the Computop Paygate response in plain text and the " " is replaced by a "&". By this you can put a single value into Custom-parameter and get multiple key-value-pairs back in response for your own purpose.  Please find a samples here: <a href="#">Custom</a>	Der "Custom"-Parameter wird vor der Verschlüsselung an den Aufruf angehängt und ist Teil des verschlüsselten "Data" im Computop Paygate Aufruf. Dadurch ist der Wert gegen Manipulation geschützt.  Der Custom-Wert wird dann in Klartext an die Computop Paygate-Antwort angehängt und dabei wird " " durch "&" ersetzt. Dadurch können Sie einen Custom-Wert übergeben und bekommen mehrere Key-Value-Paare zu Ihrer eigenen Verwendung in der Antwort zurück.  Hier finden Sie ein Beispiel: <a href="#">Custom</a>

Return parameters for URLSuccess, URLFailure and URLNotify with Przelew24

## Credit with reference

Credits (refunds) are possible via a Server-to-Server connection. For a Credit with reference to a capture the amount of the Credit is limited to the amount of the previous capture. To carry out a credit with a reference transaction, please use the following URL:

<https://www.computop-paygate.com/credit.aspx>

**Notice:** For security reasons, Computop Paygate rejects all payment requests with formatting errors. Therefore, please use the correct data type for each parameter.

The following table describes the [encrypted payment request parameters](#):

Key	Format	CND	Description
MerchantID	ans..30	M	MerchantID, assigned by Computop. Additionally this parameter has to be passed in plain language too.
PayID	an32	M	ID assigned by Paygate for the payment to be credited
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here: <ul style="list-style-type: none"> <li>• <a href="#">HMAC Authentication (Request)</a></li> <li>• <a href="#">HMAC Authentication (Notify)</a></li> </ul>

ReqId	ans..32	O	<p>To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.</p> <p>Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.</p> <p><b>Notice:</b> Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.</p>
-------	---------	---	---

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment to be credited	Vom Paygate vergebene ID für die gutzuschreibende Zahlung

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: <a href="#">A1 Währungstabelle</a>

Key	Format	CND	Description	Beschreibung
MAC	an64	M	Hash Message Authentication Code (HMAC) with SHA-256 algorithm. Details can be found here:  • <a href="#">HMAC Authentication (Request)</a> • <a href="#">HMAC Authentication (Notify)</a>	Hash Message Authentication Code (HMAC) mit SHA-256-Algorithmus. Details finden Sie hier:  • <a href="#">HMAC-Authentisierung (Anfrage)</a> • <a href="#">HMAC-Authentisierung (Notify)</a>

Key	Format	CND	Description	Beschreibung
ReqId	ans..32	O	<p>To avoid double payments or actions (e.g. by ETM), enter an alphanumeric value which identifies your transaction and may be assigned only once. If the transaction or action is submitted again with the same ReqID, Computop Paygate will not carry out the payment or new action, but will just return the status of the original transaction or action.</p> <p>Please note that the Computop Paygate must have a finalized transaction status for the first initial action (authentication /authorisation). This does not apply to 3-D Secure authentications that are terminated by a timeout. The 3-D Secure Timeout status does not count as a completed status in which the ReqID functionality on Paygate does not take effect. Submissions with identical ReqID for an open status will be processed regularly.</p> <p><b>Notice:</b> Please note that a ReqID is only valid for 12 month, then it gets deleted at the Paygate.</p>	<p>Um Doppelzahlungen (z.B. durch ETM) zu vermeiden, übergeben Sie einen alphanumerischen Wert, der Ihre Transaktion oder Aktion identifiziert und nur einmal vergeben werden darf. Falls die Transaktion oder Aktion mit derselben ReqID erneut eingereicht wird, führt das Computop Paygate keine Zahlung oder weitere Aktion aus, sondern gibt nur den Status der ursprünglichen Transaktion oder Aktion zurück.</p> <p>Bitte beachten Sie, dass das Computop Paygate für die erste initiale Aktion (Authentifizierung/Autorisierung) einen abgeschlossenen Transaktionsstatus haben muss. Dies gilt nicht für 3-D Secure Authentifizierungen, die durch einen Timeout beendet werden. Der Status 3-D Secure Timeout gilt nicht als abgeschlossener Status, bei dem ReqID-Funktionalität am Paygate nicht greift. Einreichungen mit identischer ReqID auf einen offenen Status werden regulär verarbeitet.</p> <p><b>Hinweis:</b> Bitte beachten Sie, dass eine ReqID nur 12 Monate gültig ist, danach wird sie vom Paygate gelöscht.</p>

Parameters for credit payments with Przelewy24 via socket connection

The following table describes the result parameters with which the Computop Paygate responds to your system

**i** pls. be prepared to receive additional parameters at any time and do not check the order of parameters

**i** the key (e.g. MerchantId, RefNr) should not be checked case-sentive

Key	Format	CND	Description
-----	--------	-----	-------------

mid	ans..30	M	MerchantID, assigned by Computop
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
Status	a..50	M	OK ( <a href="#">URLSuccess</a> ) or FAILED ( <a href="#">URLFailure</a> )
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!
Code	an8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )
refnr	ans..40	O	Merchant's unique reference number. Only characters a-zA-Z0-9,-_ are allowed.
ErrorText	ans..128	C	Detailed PPRO error message.  Notice: Is returned only if Status=FAILED. Use is possible only in agreement with <a href="#">Computop Helpdesk</a> .

Key	Format	CND	Description	Beschreibung
PayID	an32	M	ID assigned by Paygate for the payment, e.g. for referencing in batch files as well as for capture or credit request.	Vom Paygate vergebene ID für die Zahlung; z.B. zur Referenzierung in Batch-Dateien sowie im Capture- oder Credit-Request.

Key	Format	CND	Description	Beschreibung
XID	an32	M	ID for all single transactions (authorisation, capture, credit note) for one payment assigned by Paygate	Vom Paygate vergebene ID für alle einzelnen Transaktionen (Autorisierung, Buchung, Gutschrift), die für eine Zahlung durchgeführt werden

Key	Format	CND	Description	Beschreibung
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss

Key	Format	CND	Description	Beschreibung
Status	a..50	M	OK ( <a href="#">URLSuccess</a> ) or FAILED ( <a href="#">URLFailure</a> )	OK ( <a href="#">URLSuccess</a> ) oder FAILED ( <a href="#">URLFailure</a> )

Key	Format	CND	Description	Beschreibung
Description	ans..1024	M	Further details in the event that payment is rejected. Please <b>do not</b> use the <b>Description</b> but the <b>Code</b> parameter for the transaction status analysis!	Nähere Beschreibung bei Ablehnung der Zahlung. Bitte nutzen Sie <b>nicht</b> den Parameter <b>Description</b> , sondern <b>Code</b> für die Auswertung des Transaktionsstatus!

Key	Format	CND	Description	Beschreibung
Code	an8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Key	Format	CND	Description	Beschreibung
refnr	ans..40	O	Merchant's unique reference number. Only characters a-zA-Z0-9,-_ are allowed.	Eindeutige Referenznummer des Händlers. Nur die Zeichen a-zA-Z0-9,-_ sind erlaubt.

Key	Format	CND	Description	Beschreibung
ErrorText	ans..128	C	Detailed PPRO error message.  Notice: Is returned only if Status=FAILED. Use is possible only in agreement with <a href="#">Computop Helpdesk</a> .	Detaillierte PPRO Fehlermeldung.  Hinweis: Wird nur bei Status=FAILED zurückgegeben. Nutzung nur in Abstimmung mit dem <a href="#">Computop Helpdesk</a> möglich.

Response parameters for credit payments with Przelewy24 via socket connection

# Batch processing via the interface

Basic information about using Batch files and about their structure can be found in the Batch Manager manual. Within batch processing not all functions are available which are usually available for the online interface.

This section describes the parameters which must be transferred within the data set (**Record**) for executing credits with Przelewy24 and which information can be found within the response file about the payment status.

Following table gives an overview of all batch versions that are possible for a specific action and their specialities:

Action	Version	Description
Credit	1.0 / 2.0	Standard version without return of parameter Code
	1.x / 2.x	with RefNr (valid for all versions other than 1.0)

Description of the possible batch versions

The structure for a Przelewy24 payment within a Batch file to be submitted is the following:

```
HEAD,<MerchantID>,<Date>,<Version>
Przelewy24,Credit,<Amount>,<Currency>,<TransID>,(<RefNr>,<PayID>
FOOT,<CountRecords>,<SumAmount>
```

Example for Master MID function:

```
HEAD,[Master]MerchantID,Date,2.x
Type,Action,[Slave]MID,Amount,Currency,TransID,Data (depends on Action)
FOOT,CountRecords,SumAmount
```

The following table describes the individual fields and values used within the data set (record) in the batch file:

Key	Format	CND	Description
Type	a..11	M	HEAD for Header, FOOT for Footer, Przelewy24 for Przelewy24
Action	a..20	M	The parameter Action defines the type of transaction: Credit
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>
TransID	ans..64	M	TransactionID provided by you which should be unique for each payment
refnr	ans..40	O	Merchant's unique reference number. Only characters a-zA-Z0-9-_ are allowed.
PayID	an32	M	ID assigned by Paygate for this transaction

Key	Format	CND	Description	Beschreibung
Amount	n..10	M	Amount in the smallest currency unit (e.g. EUR Cent). Please contact the <a href="#">Computop Helpdesk</a> , if you want to capture amounts <100 (smallest currency unit).	Betrag in der kleinsten Währungseinheit (z.B. EUR Cent). Bitte wenden Sie sich an den <a href="#">Computop Helpdesk</a> , wenn Sie Beträge < 100 (kleinste Währungseinheit) buchen möchten.

Key	Format	CND	Description	Beschreibung
Currency	a3	M	Currency, three digits DIN / ISO 4217, e.g. EUR, USD, GBP. Please find an overview here: <a href="#">A1 Currency table</a>	Währung, drei Zeichen DIN / ISO 4217, z.B. EUR, USD, GBP. Hier eine Übersicht: <a href="#">A1 Währungstabelle</a>

Key	Format	CND	Description	Beschreibung

<b>TransID</b>	ans..64	M	TransactionID provided by you which should be unique for each payment	Ihre eigene TransaktionsID, die für jede Zahlung eindeutig sein muss
----------------	---------	---	---	--

<b>Key</b>	<b>Format</b>	<b>CND</b>	<b>Description</b>	<b>Beschreibung</b>
<b>refnr</b>	ans..40	O	Merchant's unique reference number. Only characters a-zA-Z0-9,_ are allowed.	Eindeutige Referenznummer des Händlers. Nur die Zeichen a-zA-Z0-9,_ sind erlaubt.

<b>Key</b>	<b>Format</b>	<b>CND</b>	<b>Description</b>	<b>Beschreibung</b>
<b>PayID</b>	an32	M	ID assigned by Paygate for this transaction	Vom Paygate vergebene ID für diese Transaktion

Description of fields within the record for Batch files

The record area within the response file for Batch transactions looks the following way:

```
HEAD,<MerchantID>,<Date>,<Version>
Przelewy24,Credit,<Amount>,<Currency>,<TransID>,(<RefNr>,<PayID>,<Status>,<Code>
FOOT,<CountRecords>,<SumAmount>
```

The following table describes the response parameters which the Batch Manager saves in the Record area for each transaction (standard parameters not explained here, such as <TransID> or <RefNR> and request parameters are returned unchanged and correspond to the call as specified before):

<b>Key</b>	<b>Format</b>	<b>CND</b>	<b>Description</b>
Action	a..20	M	The parameter Action defines the type of transaction: Credit
<b>PayID</b>	an32	M	ID assigned by Paygate for this transaction
Status	a..50	M	OK ( <a href="#">URLSuccess</a> ) or FAILED ( <a href="#">URLFailure</a> )
Code	an8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )

<b>Key</b>	<b>Format</b>	<b>CND</b>	<b>Description</b>	<b>Beschreibung</b>
<b>PayID</b>	an32	M	ID assigned by Paygate for this transaction	Vom Paygate vergebene ID für diese Transaktion

<b>Key</b>	<b>Format</b>	<b>CND</b>	<b>Description</b>	<b>Beschreibung</b>
Status	a..50	M	OK ( <a href="#">URLSuccess</a> ) or FAILED ( <a href="#">URLFailure</a> )	OK ( <a href="#">URLSuccess</a> ) oder FAILED ( <a href="#">URLFailure</a> )

<b>Key</b>	<b>Format</b>	<b>CND</b>	<b>Description</b>	<b>Beschreibung</b>
<b>Code</b>	an8	M	Error code according to Paygate Response Codes ( <a href="#">A4 Error codes</a> )	Fehlercode gemäß Paygate Antwort-Codes ( <a href="#">A4 Fehlercodes</a> )

Description of result parameters within the record for Batch files